

# CALIFORNIA EXPANDED METAL COMPANY (CEMCO) ACOUSTICAL PERFORMANCE TEST REPORT

## SCOPE OF WORK

ASTM E90 SOUND TRANSMISSION LOSS TESTING ON A WALL SYSTEM WITH 3-5/8" STEEL STUDS SPACED 24"OC WITH RC1-XD RESILIENT CHANNEL ON INTERIOR SPACED 24" OC, TWO LAYERS 5/8" USG TYPE X SOURCE (SCREW SPACING 8" ON PERIMETER 12" IN THE FIELD)/TWO LAYERS 5/8" USG TYPE X RECEIVE (SCREW SPACING 12"OC)

## REPORT NUMBER

M0014.01-303-11-R2

## TEST DATE

02/26/21

## ISSUE DATE

03/22/21

## REVISION 2 DATE

08/02/22


## PAGES

11

## DOCUMENT CONTROL NUMBER

RT-R-AMER-Test-2758 (01/17/21)

© 2017 INTERTEK

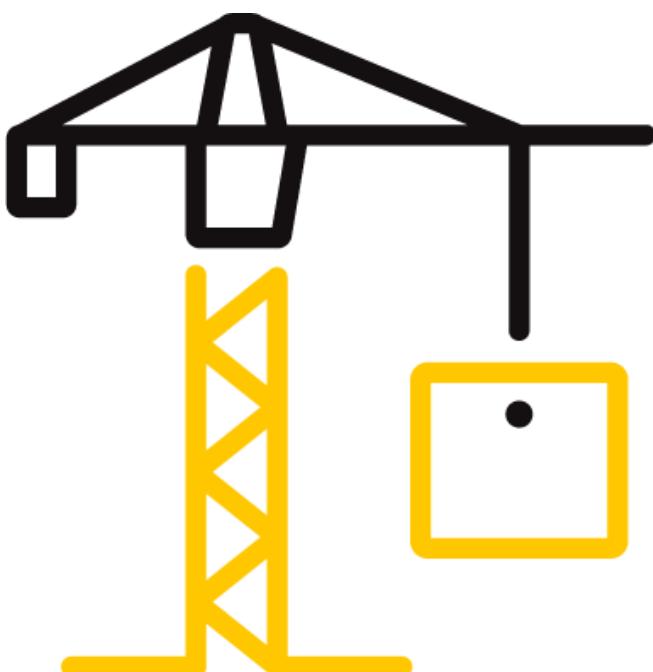

**TEST REPORT FOR CALIFORNIA EXPANDED METAL COMPANY (CEMCO)**

Report No.: M0014.01-303-11-R2

Revision 2 Date: 08/02/22 Date: 03/22/21

**REPORT ISSUED TO****CALIFORNIA EXPANDED METAL COMPANY (CEMCO)**

13191 Crossroads Parkway North Suite 325

City of Industry, California 91746

**SECTION 1****SCOPE**

Architectural Testing, Inc. (an Intertek company) dba Intertek Building & Construction (B&C) was contracted by California Expanded Metal Company (CEMCO) to conduct a sound transmission loss test. Results obtained are tested values and were secured by using the designated test methods. The complete test data is included herein. The client provided the test specimen. All measurements were conducted in the HT test chambers at Intertek B&C located in Lake Forest, California.

This report does not constitute certification of this product nor an opinion or endorsement by this laboratory. Intertek B&C will service this report for the entire test record retention period. The test record retention period ends four years after the test date. Test records, such as detailed drawings, datasheets, representative samples of test specimens, or other pertinent project documentation, will be retained for the entire test record retention period.

Unless differently required, Intertek reports apply the "Simple Acceptance" rule, also called "Shared Risk approach," of ILAC-G8:09/2019, Guidelines on Decision Rules and Statements of Conformity.

For INTERTEK B&amp;C:

<b>COMPLETED BY:</b>	Marco T. Santa Rosa	<b>REVIEWED BY:</b>	Todd D. Kister
<b>TITLE:</b>	Technician Acoustical Testing	<b>TITLE:</b>	Regional Manager Acoustical Testing
<b>SIGNATURE:</b>		<b>SIGNATURE:</b>	
<b>DATE:</b>	08/02/22	<b>DATE:</b>	08/02/22

MTSR/LSH:jmcs

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample(s) tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.



**TEST REPORT FOR CALIFORNIA EXPANDED METAL COMPANY (CEMCO)**

Report No.: M0014.01-303-11-R2

Revision 2 Date: 08/02/22 Date: 03/22/21

**SECTION 2****SUMMARY OF TEST RESULTS**

<b>TYPE</b>	Wall System
<b>DESCRIPTION</b>	3-5/8" Steel Studs spaced 24"OC with RC1-XD Resilient Channel on Interior spaced 24" OC, Two Layers 5/8" USG Type X Source (screw spacing 8" on perimeter 12" in the field)/Two Layers 5/8" USG Type X Receive (screw spacing 12"OC)
<b>DATA FILE NO.</b>	M0014.01
<b>STC</b>	62
<b>OITC</b>	45

**SECTION 3****TEST METHODS**

The specimens were evaluated in accordance with the following:

**ASTM E90-09 (2016), Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements**

**ASTM E413-16, Classification for Rating Sound Insulation**

**ASTM E1332-16, Standard Classification for Rating Outdoor-Indoor Sound Attenuation**

**ASTM E2235-04 (2020), Standard Test Method for Determination of Decay Rates for Use in Sound Insulation Test Methods**

**SECTION 4****SPECIMEN INSTALLATION**

The specimen was constructed in a 168" wide by 120" high by 16" deep steel frame test opening. Dense neoprene foam (3/8" thick by 3" wide) was adhered to the steel frame perimeter. Top and bottom plates and end studs were placed over the foam and fastened to the steel frame by TEK screws (3" long) with isolation washers.

**TEST REPORT FOR CALIFORNIA EXPANDED METAL COMPANY (CEMCO)**

Report No.: M0014.01-303-11-R2

Revision 2 Date: 08/02/22 Date: 03/22/21

**SECTION 5****EQUIPMENT**

The equipment listed below meets the requirements of the test methods stated in Section 3 of this report.

INSTRUMENT	MANUFACTURER	MODEL	DESCRIPTION	ASSET #	CAL DATE
Data Acquisition Card*	National Instruments	PXIe-4464	Data Acquisition Card	INT00392	10/19
Data Acquisition Card*	National Instruments	PXIe-4464	Data Acquisition Card	INT00394	10/19
Data Acquisition Card*	National Instruments	PXIe-4464	Data Acquisition Card	INT00395	09/19
Source Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	INT00234	04/20
Source Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	INT00235	04/20
Source Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	INT00236	04/20
Source Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	INT00237	04/20
Source Room Microphone	PCB piezotronics	378C20	Microphone and Preamplifier	INT00238	04/20
Receive Room Microphone	PBC Piezotronics	378C20	Microphone and Preamplifier	INT00229	04/20
Receive Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	INT00230	04/20
Receive Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	INT01542	04/20
Receive Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	INT00232	04/20
Receive Room Microphone	PCB Piezotronics	378C20	Microphone and Preamplifier	INT00233	04/20
Receive Room Environmental Indicator	Comet	T7510	Receive Room	INT00299	07/20
Source Room Environmental Indicator	Comet	T7510	Source Room	INT00300	07/20
Microphone Calibrator	Norsonic	1251	Acoustical Calibrator	INT00288	10/20

\*- Note: The calibration frequency for this equipment is every two years per the manufacturer's recommendation.

**TEST CHAMBER**

	VOLUME	DESCRIPTION
RECEIVE ROOM	231 m <sup>3</sup>	Rotating vane and stationary diffusers Temperature and humidity controlled Isolation pads under the floor
SOURCE ROOM	196 m <sup>3</sup>	Stationary diffusers only Temperature and humidity controlled

	MAXIMUM SIZE	DESCRIPTION
TL TEST OPENING	4.27 m wide by 3.05 m high	Vibration break between source and receive rooms

**TEST REPORT FOR CALIFORNIA EXPANDED METAL COMPANY (CEMCO)**

Report No.: M0014.01-303-11-R2

Revision 2 Date: 08/02/22 Date: 03/22/21

**SECTION 6****LIST OF OFFICIAL OBSERVERS**

NAME	COMPANY
Marco Santa Rosa	Intertek B&C
Leeland Hoover	Intertek B&C

**SECTION 7****TEST PROCEDURE**

The sensitivity of the microphones was checked before measurements were conducted.

The transmission loss values were obtained for a single direction of measurement.

Two background noise sound pressure level and five sound absorption measurements were conducted at each of five microphone positions.

Two sound pressure level measurements were made simultaneously in receive and source rooms at each of five microphone positions.

The air temperature and relative humidity conditions were monitored and recorded during all measurements.

Data for flanking limit tests, repeatability measurements, and reference specimen tests are available upon request.

Intertek B&C will store samples of test specimens for four years.

**SECTION 8****ACOUSTICAL TEST CALCULATIONS**

Transmission loss (TL) at each 1/3 octave frequency is the average source room sound pressure level minus the average receive room sound pressure level, plus, 10 times the log of the specimen area divided by the sound absorption of the receive room with the sample in place.

**STC Rating**

To obtain the Sound Transmission Class (STC), read the TL of the contour curve at 500 Hz. The sum of the deficiencies below the contour curve must not exceed 32. The maximum deficiency at any one frequency must not exceed 8.

**OITC Rating**

The Outdoor-Indoor Transmission Class (OITC) is calculated by subtracting the logarithmic summation of the TL values from the logarithmic summation of the A-weighted transportation noise spectrum stated in ASTM E1332.

**TEST REPORT FOR CALIFORNIA EXPANDED METAL COMPANY (CEMCO)**

Report No.: M0014.01-303-11-R2

Revision 2 Date: 08/02/22 Date: 03/22/21

**SECTION 9**
**SPECIMEN DESCRIPTION**

GYPSUM BOARD	Two Layers USG 5/8" Type X				
STUDS	3-5/8" Steel, 24" Centers				
INSULATION	R-13 Fiberglass				
RESILIENT CHANNEL	CEMCO RC1-XD				
GYPSUM BOARD	Two Layers USG 5/8" Type X				

MATERIAL	ACTUAL DIMENSIONS (inches)	ACTUAL THICKNESS (inches)	MANUFACTURER AND SERIES	QUANTITY	AVERAGE WEIGHT
GYPSUM BOARD	48 by 120	0.625	USG Type X	3.5 sheets	2.1 lbs/ft <sup>2</sup>
<i>Note: Screws spaced 8" OC on the perimeter and 12" OC in the field. Perimeter and joints sealed with acoustical sealant and duct tape. Screw heads sealed with duct tape.</i>					
GYPSUM BOARD	48 by 120	0.625	USG Type X	3.5 sheets	2.1 lbs/ft <sup>2</sup>
<i>Note: Screws spaced 8" OC on the perimeter and 12" OC in the field. Perimeter and joints sealed with acoustical sealant and duct tape. Screw heads sealed with duct tape.</i>					
STUD	2 by 120	3.6	CEMCO 362 VS125-18MIL (0.018")	8 pieces	0.5 lbs/linear ft
<i>Note: Spaced on 24" centers. Screwed to top and bottom plates.</i>					
INSULATION	24 by 120	3.5	R-13 Fiberglass	9 batts	0.25 lbs/ft <sup>2</sup>
<i>Note: N/A</i>					
RESILIENT CHANNEL	2 by 168	0.027	CEMCO RC1-XD	6 pieces	0.30 lbs/linear ft
<i>Note: Spaced on 24" vertical centers.</i>					
GYPSUM BOARD	48 by 120	0.625	USG Type X	3.5 sheets	2.1 lbs/ft <sup>2</sup>
<i>Note: Screws spaced on 12" centers. Perimeter and joints sealed with acoustical sealant and duct tape. Screw heads sealed with duct tape.</i>					
GYPSUM BOARD	48 by 120	0.625	USG Type X	3.5 sheets	2.1 lbs/ft <sup>2</sup>
<i>Note: Screws spaced on 12" centers. Perimeter and joints sealed with acoustical sealant and duct tape. Screw heads sealed with duct tape.</i>					
TOP PLATES	2 by 168	3.6	CEMCO 362VT125-18MIL	1 piece	0.44 lbs/linear ft
<i>Note: N/A</i>					

**TEST REPORT FOR CALIFORNIA EXPANDED METAL COMPANY (CEMCO)**

Report No.: M0014.01-303-11-R2

Revision 2 Date: 08/02/22 Date: 03/22/21

MATERIAL	ACTUAL DIMENSIONS (inches)	ACTUAL THICKNESS (inches)	MANUFACTURER AND SERIES	QUANTITY	AVERAGE WEIGHT
BOTTOM PLATES	2 by 168	3.6	CEMCO 362VT125-18MIL	1 piece	0.44 lbs/linear ft
<i>Note: N/A</i>					

TOTAL WEIGHT (lbs)	AVERAGE WEIGHT (lbs/ft <sup>2</sup> )
1298.52	9.28

*N/A-Not Applicable*

Photographs are included in Section 11.

The client did not supply a report drawing of the test specimen.

**TEST REPORT FOR CALIFORNIA EXPANDED METAL COMPANY (CEMCO)**

Report No.: M0014.01-303-11-R2

Revision 2 Date: 08/02/22 Date: 03/22/21

**SECTION 10**
**TEST RESULTS**
**ASTM E90**  
**AIRBORNE SOUND TRANSMISSION LOSS**

 ACCREDITED<sup>®</sup>

Testing Laboratory

TEST DATE	02/26/21				
DATA FILE NO.	M0014.01				
CLIENT	California Expanded Metal Company (CEMCO)				
DESCRIPTION	3-5/8" Steel Studs spaced 24"OC with RC1-XD Resilient Channel on Interior spaced 24" OC, Two Layer 5/8" USG Type X Source (screw spacing 8" on perimeter 12" in the field) / Two Layer 5/8" USG Type X Receive (screw spacing 12"OC)				
SPECIMEN AREA	13.01 m <sup>2</sup>	RECEIVE TEMP.	19.4 °C	SOURCE TEMP	18.6 °C
TECHNICIAN	Marco T San	RECEIVE HUMIDITY	44%	SOURCE HUMIDIT	43%

FREQ (Hz)	BACKGROUND SPL (dB)	ABSORPTION (m <sup>2</sup> )	SOURCE SPL (dB)	RECEIVE SPL (dB)	SPECIMEN TL (dB)	95% CONFIDENCE LIMIT	NUMBER OF DEFICIENCIES
80	38.3	4.5	103	80	28	2.08	-
100	34.9	4.5	102	72	34	1.22	-
125	41.1	4.7	103	67	41	0.88	5
160	44.8	4.9	103	63	45	0.92	4
200	38.8	6.1	106	60	50	0.57	2
250	31.1	7.2	107	56	54	0.56	1
315	34.3	7.0	106	52	57	0.49	1
400	39.8	6.0	106	50	59	0.55	2
500	24.8	5.4	106	48	62	0.42	0
630	21.9	5.9	106	46	64	0.36	0
800	24.9	6.1	105	43	66	0.34	0
1000	18.0	6.2	107	42	67	0.12	0
1250	16.1	6.4	105	41	67	0.19	0
1600	6.8	7.0	103	39	67	0.19	0
2000	4.5	8.2	101	44	59	0.19	7
2500	3.8	9.3	101	43	59	0.19	7
3150	4.0	10.7	100	38	63	0.22	3
4000	4.7	13.3	97	30	66	0.26	0
5000	5.5	17.1	92	22	70	0.26	-
STC RATING	62	(Sound Transmission Class)					
DEFICIENCIES	32	(Sum of Deficiencies)					
OITC RATING	45	(Outdoor-Indoor Transmission Class)					

**Notes:**

- 1) Receive Room levels less than 5 dB above the Background levels are red.
- 2) Specimen TL levels listed in red indicate the lower limit of the transmission loss.
- 3) Specimen TL levels listed in green indicate that there has been a filler wall correction applied


**TEST REPORT FOR CALIFORNIA EXPANDED METAL COMPANY (CEMCO)**

Report No.: M0014.01-303-11-R2

Revision 2 Date: 08/02/22 Date: 03/22/21

**ASTM E90**  
**AIRBORNE SOUND TRANSMISSION LOSS**

TEST DATE	02/26/21				
DATA FILE NO.	M0014.01				
CLIENT	California Expanded Metal Company (CEMCO)				
DESCRIPTION	3-5/8" Steel Studs spaced 24"OC with RC1-XD Resilient Channel on Interior spaced 24" OC, Two Layer 5/8" USG Type X Source (screw spacing 8" on perimeter 12" in the field) / Two Layer 5/8" USG Type X Receive (screw spacing 12"OC)				
SPECIMEN AREA	13.01 m <sup>2</sup>	RECEIVE TEMP.	19.4 °C	SOURCE TEMP	18.6 °C
TECHNICIAN	Marco T San	RECEIVE HUMIDITY	44%	SOURCE HUMIDIT	43%

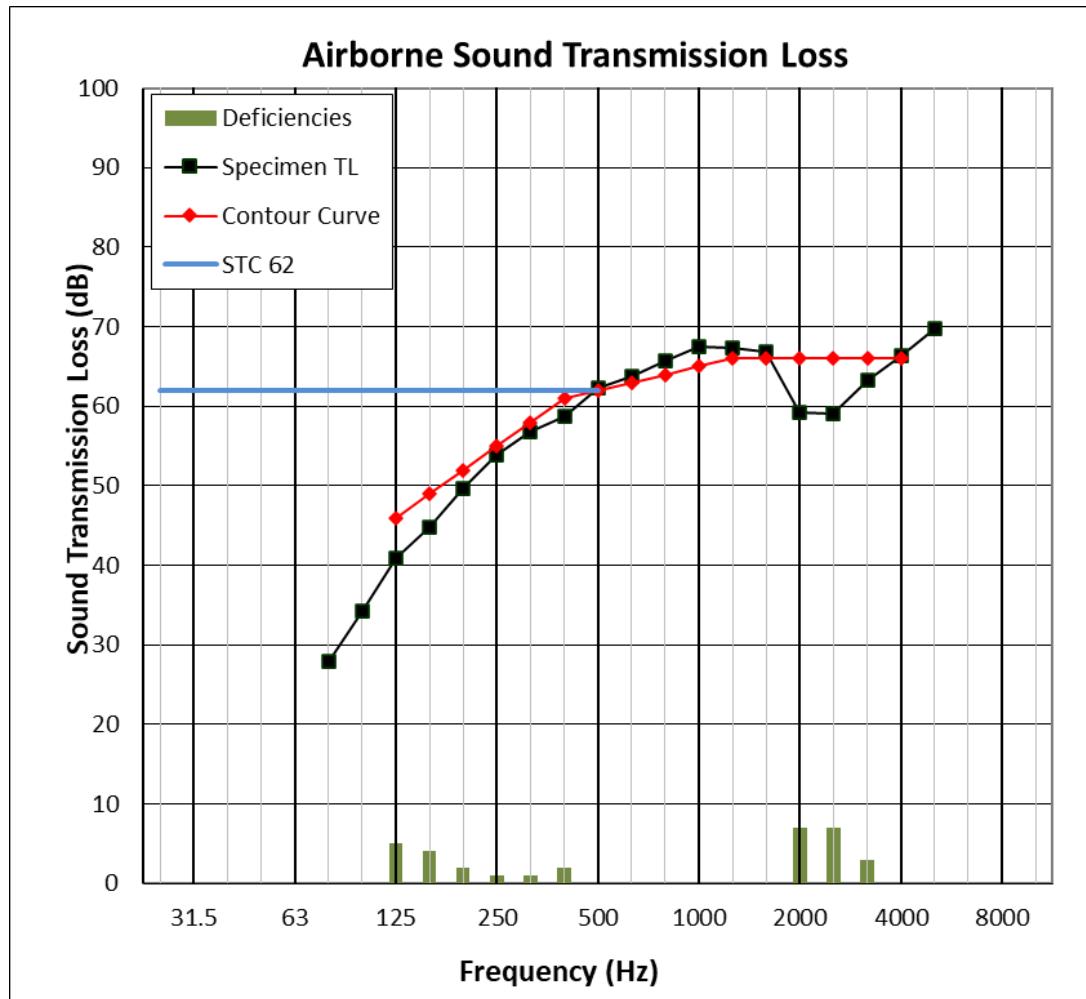

## TEST REPORT FOR CALIFORNIA EXPANDED METAL COMPANY (CEMCO)

Report No.: M0014.01-303-11-R2

Revision 2 Date: 08/02/22 Date: 03/22/21

### SECTION 11

#### PHOTOGRAPHS



**Photo No. 1**  
**Source Room View of Test Specimen**



**Photo No. 2**  
**Receive Room View of Test Specimen**

**TEST REPORT FOR CALIFORNIA EXPANDED METAL COMPANY (CEMCO)**

Report No.: M0014.01-303-11-R2

Revision 2 Date: 08/02/22 Date: 03/22/21

**SECTION 12****REVISION LOG**

REVISION #	DATE	PAGES	REVISION
0	03/22/21	N/A	Original Report Issue
1	03/24/21	8, 9	Updated Datasheets
2	08/02/22	1, 3, 8, 9	Corrected resilient channel spacing
2	08/02/22	1, 3	Changed Series/Model to Description