



Expanding Your Solutions

Corporate Headquarters
13191 Crossroads Pkwy N., Ste 325
City of Industry, CA 91746
Phone: 800.775.2362
Fax: 626.330.7598

Manufacturing Facilities
City of Industry, CA
Denver, CO
Ft. Worth, TX
Pittsburg, CA

Structural Engineering/Design
1001-A Pittsburgh Antioch Hwy
Pittsburg, CA 94565
Phone: 800.775.2362
Fax: 626.330.7598

Technical Services
13191 Crossroads Pkwy N., Ste 325
City of Industry, CA 91746
Phone: 800.416.2278
Fax: 626.249.5004

SELF-FURRED METAL LATH (DIMPLED) WITH "D" PAPER

Introduction

CEMCO's Self-Furred Diamond Metal Lath "Dimpled" is manufactured with $\frac{1}{4}$ " dimples in the lath. The dimples provide the necessary minimum $\frac{1}{4}$ " furring off the sheathing's surface to allow for proper embedment and keying of the scratch coat on all types of walls. This lath is available with Grade D asphalt paper backing. A saturated black asphalt paper complying with Federal Spec. No. UUB-790A Style 2 Grade D. Manufactured with a 3" lap for weathered application. All CEMCO expanded metal lath is produced from standard G60 hot-dipped galvanized steel. G90 is available upon special request.

Packaging

Weight per Square Yard (lb/yd ²)	Sheet Size	Pieces per bundle	Yards per Pallet
1.75	27.5" x 97"	10	500
2.5	27.5" x 97"	10	500
3.4	27.5" x 97"	10	500

Note: 25 bundles per pallet.

ASTM's & Code Standards

- ASTM A653
- ASTM C841 (Installation)
- ASTM C847
- ASTM A924
- ASTM C1063 (Installation)
- ICC ESR-1623
- Fed. Spec. QQ-1-101C and UUB-790A Style 2 Grade D (Paper)
- ANSI A42.3, ANSI A42.4
- U.S. HUD 4930.1

LEED v4 for Building and Design Construction


- MR Prerequisite: Construction and Demolition Waste Management Planning.
- MR Credit: Construction and Demolition Waste Management.
- MR Credit: Building Product Disclosure and Optimization – Sourcing of Raw Materials, Option 2.
- MR Credit: Building Product Disclosure and Optimization – Environmental Product Declarations, Options 1 & 2.
- MR Credit: Building Product Disclosure and Optimization – Material Ingredients, Option 1.
- MR Credit: Building Life-Cycle Impact Reduction, Option 4.

CEMCO cold-formed steel framing products contain 30% to 37% recycled steel.

- Total Recycled Content: 36.9%
- Post-Consumer: 19.8%
- Pre-Consumer: 14.4%

Technical Services

Technical Services: 800.416.2278
Structural Engineering/Design: 925.473.9340
www.cemcosteel.com

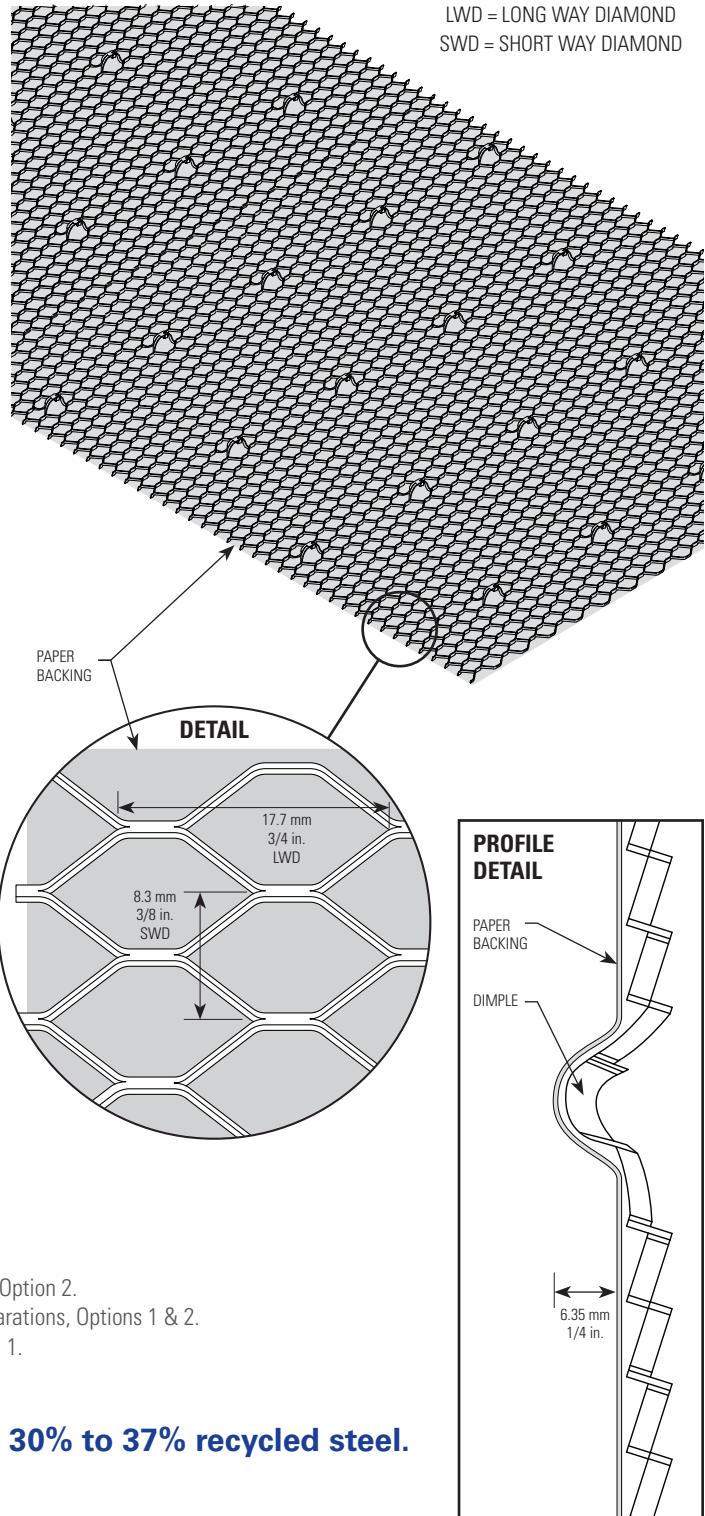

This technical information reflects the most current information available and supersedes any and all previous publications effective April 4, 2019.
04-04-19 AT