



Expanding Your Solutions

Corporate Headquarters

13191 Crossroads Pkwy N., Ste 325
City of Industry, CA 91746
Phone: 800.775.2362
Fax: 626.330.7598

Manufacturing Facilities

City of Industry, CA
Denver, CO
Ft. Worth, TX
Pittsburg, CA

Structural Engineering/Design

1001-A Pittsburgh Antioch Hwy
Pittsburg, CA 94565
Phone: 800.775.2362
Fax: 626.330.7598

Technical Services

13191 Crossroads Pkwy N., Ste 325
City of Industry, CA 91746
Phone: 800.416.2278
Fax: 626.249.5004

SELF-FURRED METAL LATH (GROOVED) WITHOUT PAPER

Introduction

CEMCO's Self-Furred Diamond Metal Lath "Grooved" is manufactured with 5 "V"-grooves in the lath in lieu of standard "dimples." These 5 grooves provide the necessary 1/4" furring off the sheathing's surface to allow for proper embedment and keying of the scratch coat on all types of walls. All CEMCO expanded metal lath is produced from standard G60 hot-dipped galvanized steel. G90 is available upon special request.

Packaging

Weight per Square Yard (lb/yd ²)	Sheet Size	Pieces per bundle	Yards per Pallet
2.5	27.5" x 97"	10	500
3.4	27.5" x 97"	10	500

Note: 25 bundles per pallet.

ASTM's & Code Standards



- ASTM A653
- ASTM C841 (Installation)
- ASTM C847
- ASTM A924
- ASTM C1063 (Installation)
- ICC ESR-1623
- ANSI A42.3, ANSI A42.4
- U.S. HUD 4930.1

LEED v4 for Building and Design Construction

- MR Prerequisite: Construction and Demolition Waste Management Planning.
- MR Credit: Construction and Demolition Waste Management.
- MR Credit: Building Product Disclosure and Optimization – Sourcing of Raw Materials, Option 2.
- MR Credit: Building Product Disclosure and Optimization – Environmental Product Declarations, Options 1 & 2.
- MR Credit: Building Product Disclosure and Optimization – Material Ingredients, Option 1.
- MR Credit: Building Life-Cycle Impact Reduction, Option 4.

CEMCO cold-formed steel framing products contain 30% to 37% recycled steel.

- Total Recycled Content: 36.9%
- Post-Consumer: 19.8%
- Pre-Consumer: 14.4%

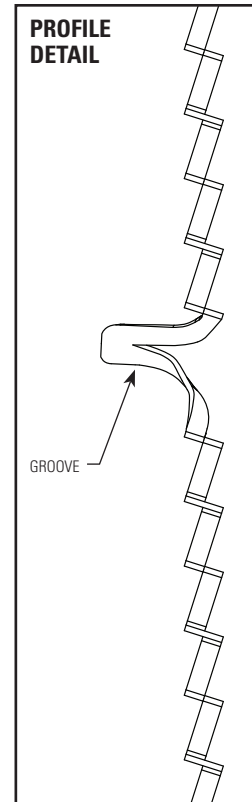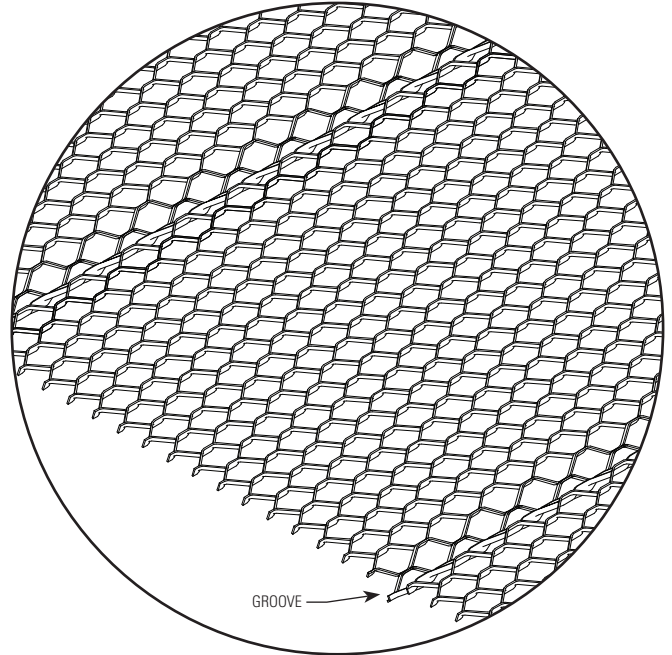

Technical Services

Technical Services: 800.416.2278
Structural Engineering/Design: 925.473.9340
www.cemcosteel.com



This technical information reflects the most current information available and supersedes any and all previous publications effective April 4, 2019.

04-04-19 AT