

400VS125-18-70 (20EQ) VIPERSTUD

Geometric Properties

4" x 1-1/4" flange, 18 mil ViperStuds are manufactured from standard G40 hot-dipped galvanized steel. G60 and G90 coatings are available through special order, and may require up-charges and extended lead times.

Steel Thickness

Model No.	Design Thickness (in)	Minimum Thickness (in)	Yield (ksi)	"W" Web Sizes (in)	Coating ^{4,5}	Flange (in)	"L" Return Lip (in)
400VS125-18-70 (20EQ)	0.0190	0.0181	70	4	G40	1-1/4	.338

Notes: 1. Uncoated steel thickness. Thickness is for carbon sheet steel. 2. Minimum thickness represents 95% of the design thickness and is the minimum acceptable thickness. 3. Knockout size for 4" Stud is 1-1/2" x 2-1/2". 4. Per ASTM C645 & A1003, Table 1. 5. G60 and G90 available upon request. Will require extended lead time and upcharge.


Color Code (painted on ends): 18 mil: None

ASTM & Code Standards:

- ASTM A653/A653M, A924/A924M, A1003/1003, C645 & C754
- ICC-ES & SFIA Code Compliance Certification Program
- ICC ESR-2620 ■ CBC: 2013, 2016, 2019
- IBC: 2012, 2015, 2018, 2021 ■ AISI: S100, S220

LEED v4 for Building and Design Construction

- MR Prerequisite: Construction and Demolition Waste Management Planning.
- MR Credit: Construction and Demolition Waste Management.
- MR Credit: Building Product Disclosure and Optimization – Sourcing of Raw Materials, Option 2.
- MR Credit: Building Product Disclosure and Optimization – Environmental Product Declarations, Options 1 & 2.
- MR Credit: Building Product Disclosure and Optimization – Material Ingredients, Option 1.
- MR Credit: Building Life-Cycle Impact Reduction, Option 4.

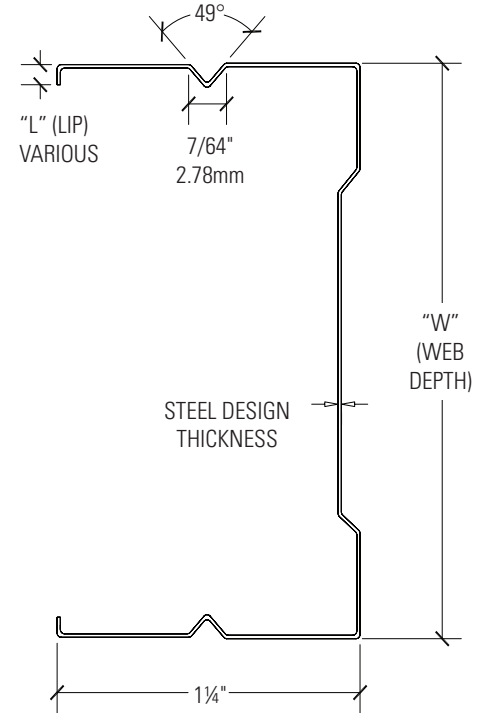

400VS125-18-70 (20EQ) ViperStud Properties

Design (in)	Min (in)	Yield (ksi)	Weight (lb/ft)	Gross Properties					Effective Properties		Moment				Critical Unbraced Length Lu (in)
				Area (in ²)	Ix (in ⁴)	Iy (in ⁴)	rx (in)	ry (in)	Ixd (in ⁴)	Sx (in ³)	Allowable Moment Ma (in-k)	Local Buckling Nominal Moment Viper Mnl (in-k)	Distortional Buckling Nominal Moment Viper Mnd (in-k)	Nominal Moment for Conventional Studs Mn (in-k)	
0.0190	0.0181	70	0.449	0.132	0.315	1.550	0.0266	0.449	0.265	0.085	3.44	5.93	5.74	5.74 (30 mil)	21.5

Notes: 1. Nominal Moments for Viper25 are based on testing. Allowable moment (Ma) is calculated with safety factor of 1.81 in accordance with chapter F of AISI S100 & S220 specification. 2. Nominal moment for Viper20, Viper 30mil, Viper 33mil and

conventional studs are based on calculations per AISI S100. 3. Section properties are in accordance with AISI S100 & S220. 4. Web depth-to-thickness ratio exceeds 200. 5. Web depth-to-thickness ratio exceeds 260. 6. ViperStud is considered fully braced when the unbraced

length is less than listed Lu. 7. K_Φ assumed to be zero for distortional buckling moments.

Non-Composite Limiting Heights – Braced at 48" O.C.

Depth (in)	Gauge	Member Designation	Design (in)	Min (in)	Yield (ksi)	Spacing (o.c.)	5 PSF			7.5 PSF			10 PSF		
							L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
4	20EQ	400VS125-18-70 (20EQ)	0.0190	0.0181	70	12	18'-1"	15'-1"	13'-2"	14'-10"	13'-2"	11'-7"	12'-10"	12'-0"	10'-6"
		400VS125-18-70 (20EQ)	0.0190	0.0181	70	16	15'-8"	13'-10"	12'-0"	12'-10"	12'-0"	10'-6"	11'-1"	10'-11"	9'-6"
		400VS125-18-70 (20EQ)	0.0190	0.0181	70	24	12'-10"	12'-0"	10'-6"	10'-6"	10'-6"	9'-2"	9'-1"	9'-1"	8'-4"

Notes: 1. Limiting heights are in accordance with AISI S100 & S220 using all steel non-composite design. 2. Limiting heights are established by considering flexure, shear, web crippling and deflection. 3. Lateral-Torsional buckling moments are based on section C3.1.2.1 of AISI S100, with max discrete bracing of 48" o.c. 4. For web crippling, when h/t ≤ 200, the web crippling values are computed based on section C3.4.2 of AISI S100 & S220, when h/t > 200, the

web crippling values are based on testing with a bearing length of 1". 5. No web stiffeners are required for studs with h/t > 200, web crippling and shear values have been confirmed by testing. 6. The factory punchouts are in accordance with section C5 of AISI S100 & S220. The distance from the center of last punchout to the end of the stud is 12".

"f" - flexure controls; "s" - shear controls; "w" - web crippling controls. No letter next to the number means deflection controls.

400VS125-18-70 (20EQ) VIPERSTUD

PAGE 2

Non-Composite Limiting Heights – Fully Braced

Depth (in)	Gauge	Member Designation	Design (in)	Min (in)	Yield (ksi)	Spacing (o.c.)	5 PSF			7.5 PSF			10 PSF		
							L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
4	20EQ	400VS125-18-70 (20EQ)	0.0190	0.0181	70	12	19'-1"	15'-1"	13'-2"	16'-8"	13'-2"	11'-7"	15'-1"	12'-0"	10'-6"
		400VS125-18-70 (20EQ)	0.0190	0.0181	70	16	17'-4"	13'-10"	12'-0"	15'-1"	12'-0"	10'-6"	13'-1"	10'-11"	9'-6"
		400VS125-18-70 (20EQ)	0.0190	0.0181	70	24	15'-1"	12'-0"	10'-6"	12'-5"	10'-6"	9'-2"	10'-8"	9'-6"	8'-4"

Notes: 1. Limiting heights are in accordance with AISI S100 & S220 using all steel non-composite design. 2. Limiting heights are established by considering flexure, shear, web crippling and deflection. 3. For bending, studs are assumed to be adequately braced to develop full allowable moment. **Studs are considered fully braced when unbraced length is less than L_u . See section properties table for L_u values.** 4. For web crippling, when $h/t \leq 200$,

the web crippling values are computed based on section C3.4.2 of AISI S100 & S220, when $h/t > 200$, the web crippling values are based on testing with a bearing length of 1". 5. No web stiffeners are required for studs with $h/t > 200$, web crippling and shear values have been confirmed by testing. 6. The factory punchouts are in accordance with section C5 of AISI S100 & S220. The distance from the center of last punchout to the end of the stud is 12".

"f" - flexure controls; "s" - shear controls; "w" - web crippling controls. No letter next to the number means deflection controls.

Allowable Composite Heights for Non-Load Bearing Walls

Depth (in)	Gauge	Member Designation	Design (in)	Min (in)	Yield (ksi)	Spacing (o.c.)	5 PSF			7.5 PSF			10 PSF		
							L/120	L/240	L/360	L/120	L/240	L/360	L/120	L/240	L/360
4	20EQ	400VS125-18-70 (20EQ)	0.0190	0.0181	70	12	22'-11"	18'-11"	16'-8"	20'-0"	16'-7"	14'-7"	18'-2"	15'-1"	13'-3"
		400VS125-18-70 (20EQ)	0.0190	0.0181	70	16	20'-10"	17'-3"	15'-2"	18'-2"	15'-1"	13'-3"	16'-6"	13'-8"	12'-1"
		400VS125-18-70 (20EQ)	0.0190	0.0181	70	24	18'-2"	15'-1"	13'-3"	15'-10"	13'-2"	11'-7"	13'-6"	11'-11"	10'-5"

Notes: 1. Viper composite limiting heights are based on testing in accordance with ICC-ES acceptance criteria AC86. 2. No screws are required between stud and track, except as required by ASTM C754. Composite heights are based on using standard top track. Mechanical fastening of gypsum panel to the stud and track is required. These heights are also valid when installing a minimum 30 mil slotted track

with 2-1/2" legs in lieu of standard track. 3. Viper composite limiting heights based on a single layer of 5/8" Type X gypsum board applied vertically to both sides of the wall over full height. 5/8" Type X wallboard from the following manufacturers are acceptable: USG, National, Georgia Pacific, CertainTeed, American and Continental.

5. Review fire related assemblies for any additional requirements.

4. For deflection track usage contact Technical Services.

CEMCO cold-formed steel framing products contain 30% to 37% recycled steel.

■ Total Recycled Content: 36.9% ■ Post-Consumer: 19.8% ■ Pre-Consumer: 14.4%

CSI Division:

■ 09.22.16 – Non-Structural Metal Framing