




Expanding Your Solutions

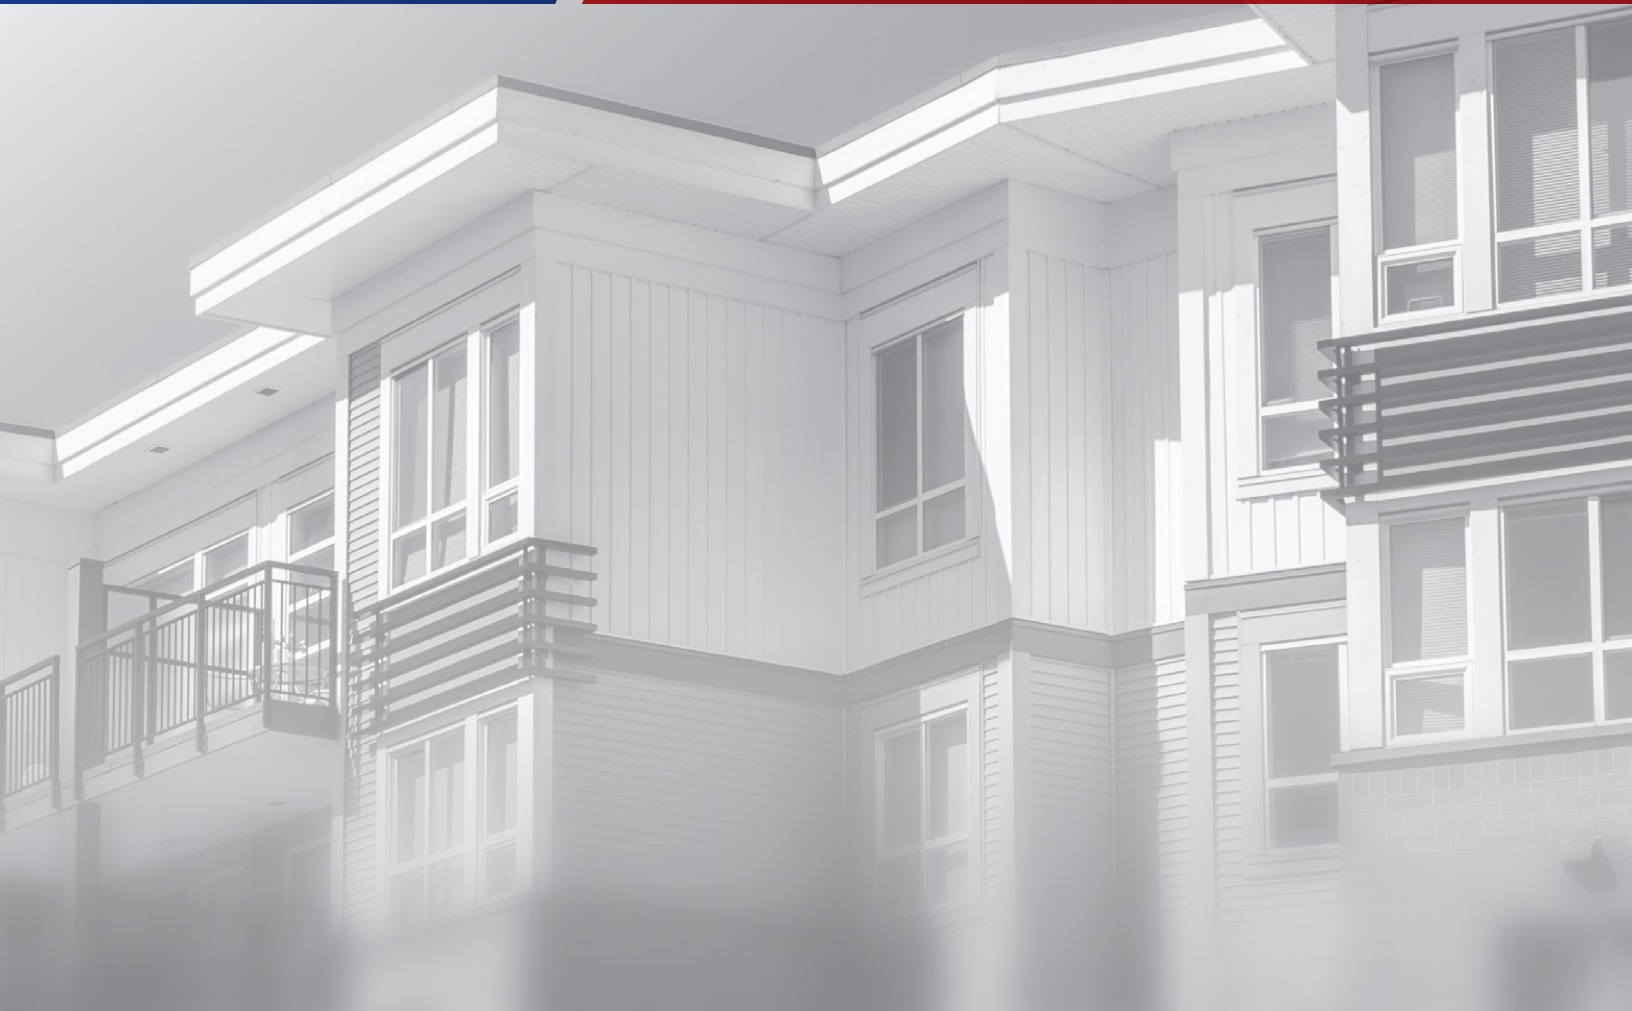

Metal Lath and Water Management Products

CEMCO Metal Lath is Listed in: ICC ESR-1623

Code Information:

- 2012/2015 IBC
- 2013/2016 CBC

CEMCO Metal Lath and Accessories are in Compliance with the Following ASTMs

- **ASTM A1003** Standard Specification for Steel Sheet, Carbon, Metallic- and Nonmetallic Coated for Cold-Formed Framing Members
- **ASTM A653/A653M** Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
- **ASTM A924/A924M** Standard Specification for General Requirements for Steel Sheet, Metallic-Coated by the Hot-Dip Process

Metal Lath

- **ASTM C847** Standard Specification for Metal Lath
- **ASTM C1063** Standard Specification for Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster
- **ASTM C841** Standard Specification for Installation of Interior Lathing and Furring

Control Joints, Bead and Accessories

- **ASTM C840** Standard Specification for Application and Finishing of Gypsum Board
- **ASTM C1047** Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base

Welded Wire Lath

- **ASTM C933** Standard Specification for Welded Wire Lath

LEED® v4 Information

LEED® V4 MR Credit:

- Building Product Disclosure and Optimization: EPD (up to 2 points)
- Sourcing of Raw Materials (1 point)
- Material Ingredients (1 point)
- Construction and Demolition Waste Management (up to 2 points)
- Innovation Credit (up to 2 points)

Recycled Content

- Total Recycled Content: 36.9%
- Post Consumer Content: 19.8%
- Pre Consumer (Post Industrial) Content: 14.4%

California's Proposition 65 Warning

California's Safe Drinking Water and Toxic Enforcement Act of 1986 – commonly referred to as Proposition 65 ("Prop 65") (27 Cal. Code Reg. § 25600, et seq.) – has recently changed, requiring manufacturers to provide a warning based on its knowledge about the presence of one or more of the almost 900 listed chemicals which are known to the State of California to cause cancer and birth defects, or other reproductive harm. With a few exceptions, manufacturers operating in the state of California as well as those entities who distribute, import, package, and/or supply products into the State of California are now required provide a "clear and reasonable" warning to consumers that their products may contain one or more of these listed chemicals or compounds. The complete list is available at www.P65Warnings.ca.gov.

In compliance with the new requirements, we are notifying each of our customers that CEMCO products contain Nickel (metallic) and/or other chemicals listed which are known to the State of California to cause cancer and birth defects or other reproductive harm. Safety data sheets from our major suppliers are available from CEMCO on our website at www.cemcosteel.com.

Metal Lath Products

Expanded Metal Lath	4
Expanded Metal Lath w/ D-Paper	4
Self-Furring Dimpled Lath	4
Self-Furring Dimpled Lath w/ D-Paper	5
Self-Furring Grooved Lath	5
Self-Furring Grooved Lath w/ D-Paper	5
3/8" Hi-Rib	6
3/8" Hi-Rib w/ K-Paper	6

Corner and Casing Beads, Screeds

1-A Cornerbead	7
2-A Cornerbead	7
Smooth Edge Cornerite	7
CEMCORNER	8
• CEMCORNER – Straight	
• CEMCORNER – Straight Arch	
• CEMCORNER – Short Flange	
• CEMCORNER – Bullnose	
• CEMCORNER – Bullnose Arch	
• CEMCORNER – Bullnose Short Flange	
Stripite	9
Patches	9
#66 Short Flange Casing	9
#66 Expanded Flange Casing	10
#7 Foundation Sill Screed	10
#36 Foundation Sill Screed	10
#34 Foundation Sill Screed	11
J-Metals	11



Control and Expansion Joints

Double "J" (#XJ-15) Control Joint	12
Double "V" (#15) Control Joint	12
#30 Corner Control Joint	13
#093 Zinc Control Joint	13
#093X Fire-Rated Control Joint	14

Water Management Products

#3 Flashing Screed	15
#6 Head Drip Screed	15
#7 Extended Foundation Screed	15
#9 Horizontal Control Joint	16
#12 Soffit Drip Edge	16
#15 Solid Leg Control Joint	16
J-Series Casing Bead	17
M-Slide Expansion Joint	17

EXPANDED METAL LATH

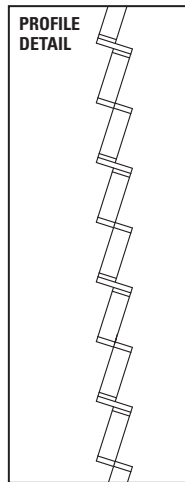
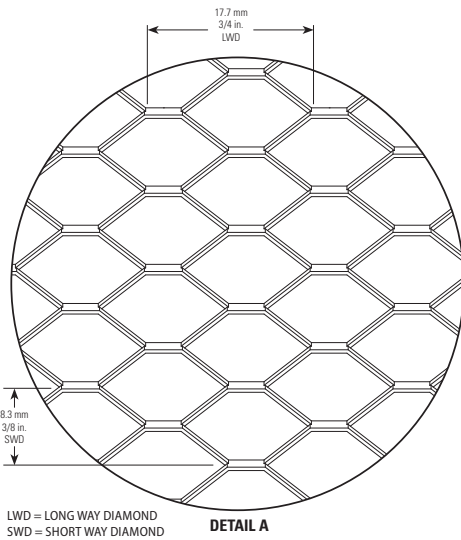


CEMCO's Diamond Metal Lath is a versatile base for cement plaster walls. Its carefully formed diamond keys allow for proper embedment and keying of the scratch coat on all types of walls. Can be used with hand and machine applied plaster. All CEMCO expanded metal lath is produced from standard G60 hot-dipped galvanized steel. G90 is available upon special request. 50 bundles per pallet.

PACKAGING

Weight per Square Yard (lb/yd ²)	Minimum Thickness	Sheet Size	Pieces / Bundle	Yards / Pallet
1.75	0.016"	27.5" x 97"	10	1000
2.5	0.0175"	27.5" x 97"	10	1000
3.4	0.0231"	27.5" x 97"	10	1000

EXPANDED METAL LATH W/ D-PAPER

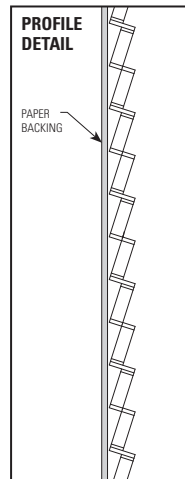
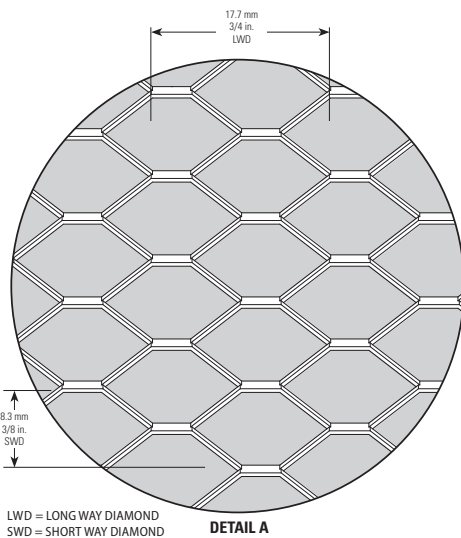


CEMCO's Diamond Metal Lath is available with Grade D asphalt paper backing. A saturated black asphalt paper complying with Federal Spec. No. UUB-790A Style 2 Grade D. Manufactured with a 3" lap for weathered application. All CEMCO expanded metal lath is produced from standard G60 hot-dipped galvanized steel. G90 is available upon special request. 25 bundles per pallet.

PACKAGING

Weight per Square Yard (lb/yd ²)	Minimum Thickness	Sheet Size	Pieces / Bundle	Yards / Pallet
1.75	0.016"	27.5" x 97"	10	500
2.5	0.0175"	27.5" x 97"	10	500
3.4	0.0231"	27.5" x 97"	10	500

SELF-FURRING DIMPLED LATH

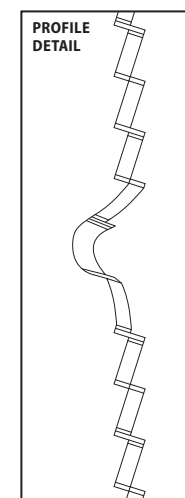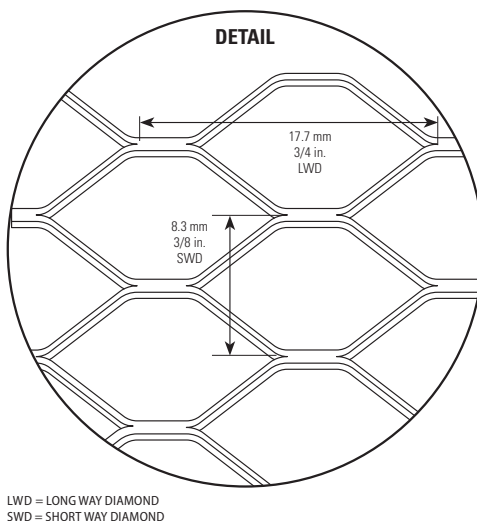


CEMCO's Self Furred Diamond Metal Lath "Dimpled" is manufactured with 1/4" dimples in the lath. The dimples provide the necessary minimum 1/4" furring off the sheathing's surface to allow for proper embedment and keying of the scratch coat on all types of walls. CEMCO Self-Furring Dimpled metal lath is produced from standard G60 hot-dipped galvanized steel. G90 is available upon special request. 50 bundles per pallet.

PACKAGING

Weight per Square Yard (lb/yd ²)	Minimum Thickness	Sheet Size	Pieces / Bundle	Yards / Pallet
1.75	0.016"	27.5" x 97"	10	500
2.5	0.0175"	27.5" x 97"	10	500
3.4	0.0231"	27.5" x 97"	10	500

SELF-FURRING DIMPLED LATH W/ D-PAPER

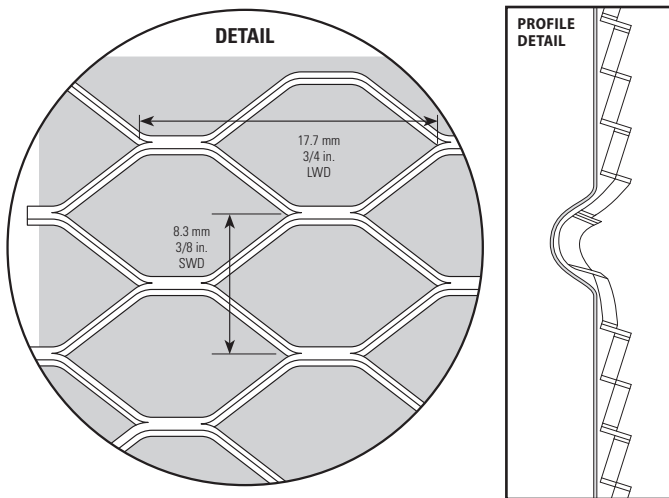


CEMCO's Self Furred Diamond Metal Lath "Dimpled" is available with Grade D asphalt paper backing. A saturated black asphalt paper complying with Federal Spec. No. UUB-790A Style 2 Grade D. Manufactured with a 3" lap for weathered application. CEMCO Self-Furring Dimpled with D-paper metal lath is produced from standard G60 hot-dipped galvanized steel. G90 is available upon special request. 25 bundles per pallet.

PACKAGING

Weight per Square Yard (lb/yd ²)	Minimum Thickness	Sheet Size	Pieces / Bundle	Yards / Pallet
1.75	0.016"	27.5"x 97"	10	500
2.5	0.0175"	27.5"x 97"	10	500
3.4	0.0231"	27.5"x 97"	10	500

SELF-FURRING GROOVED LATH

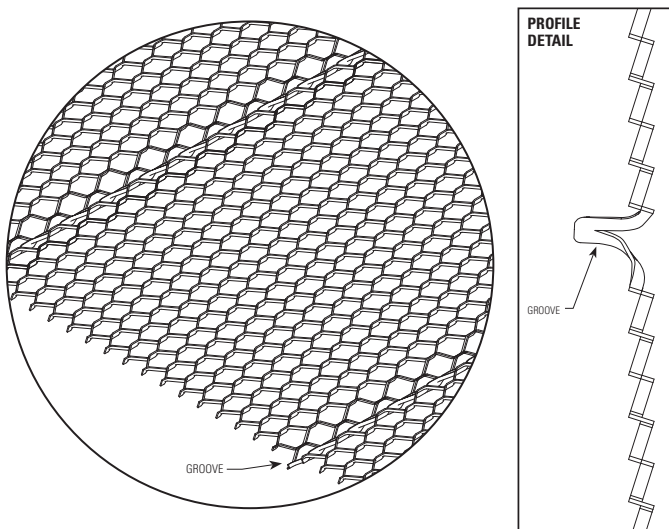


CEMCO's Self Furred Diamond Metal Lath "Grooved" is manufactured with 5 "V"-grooves in the lath in lieu of standard "dimples." These 5 grooves provide the necessary 1/4" furring off the sheathing's surface to allow for proper embedment and keying of the scratch coat on all types of walls. CEMCO Self-Furring Grooved metal lath is produced from standard G60 hot-dipped galvanized steel. G90 is available upon special request. 50 bundles per pallet.

PACKAGING

Weight per Square Yard (lb/yd ²)	Minimum Thickness	Sheet Size	Pieces / Bundle	Yards / Pallet
2.5	0.0175"	27.5"x 97"	10	500
3.4	0.0231"	27.5"x 97"	10	500

SELF-FURRING GROOVED LATH W/ D-PAPER

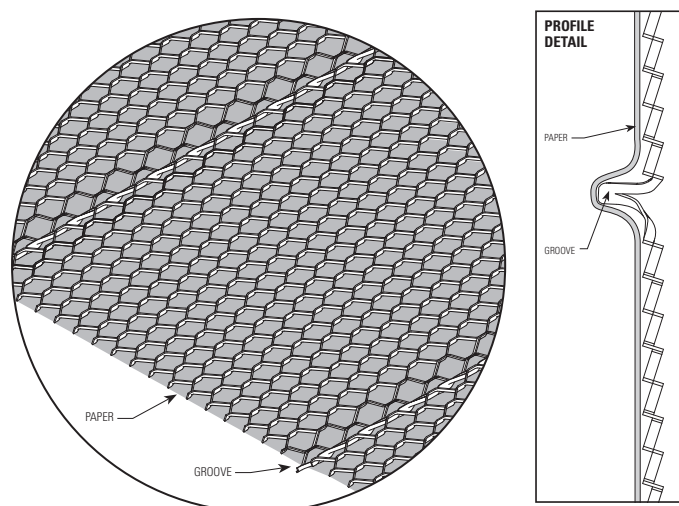


CEMCO's Self Furred Diamond Metal Lath "Grooved" is available with Grade D asphalt paper backing. A saturated black asphalt paper complying with Federal Spec. No. UUB-790A Style 2 Grade D. Manufactured with a 3" lap for weathered application. CEMCO Self-Furring Grooved w/ D-Paper metal lath is produced from standard G60 hot-dipped galvanized steel. G90 is available upon special request. 25 bundles per pallet.

PACKAGING

Weight per Square Yard (lb/yd ²)	Minimum Thickness	Sheet Size	Pieces / Bundle	Yards / Pallet
2.5	0.0175"	27.5"x 97"	10	500
3.4	0.0231"	27.5"x 97"	10	500

3/8" HI-RIB

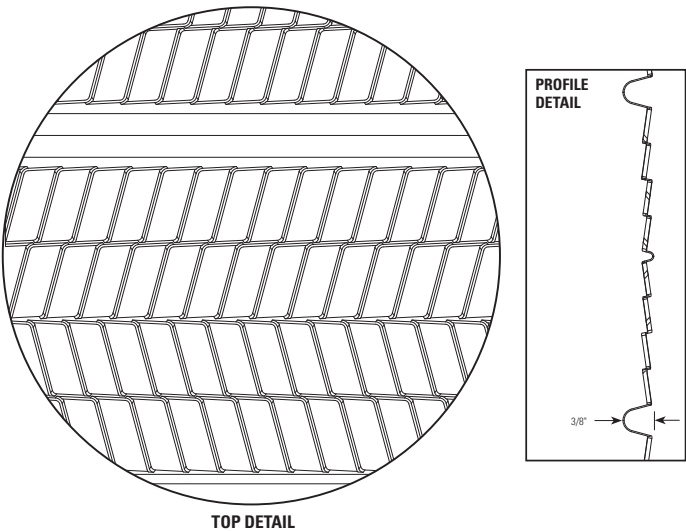


CEMCO's 3/8" Hi-Rib Lath is the most rigid of all metal laths. With full 3/8" ribs longitudinally spaced at 4" apart between each 3/8" rib with a 1/8" rib. Hi-Rib lath is able to span up to 24" on center. This lath can be used in both vertical and horizontal applications. Please consult CEMCO's Technical Services for specifics. CEMCO 3/8" Hi Rib lath is fabricated from 0.015-inch-thick in standard G60 hot-dipped galvanized steel. G90 is available upon special request.

PACKAGING

Sheet Size	Pieces/ Bundle	Yards/ Bundle	Yards/ Pallet	Bundle/ Pallet
27.5" x 96"	10	20	1000	50

3/8" HI-RIB W/ K-PAPER

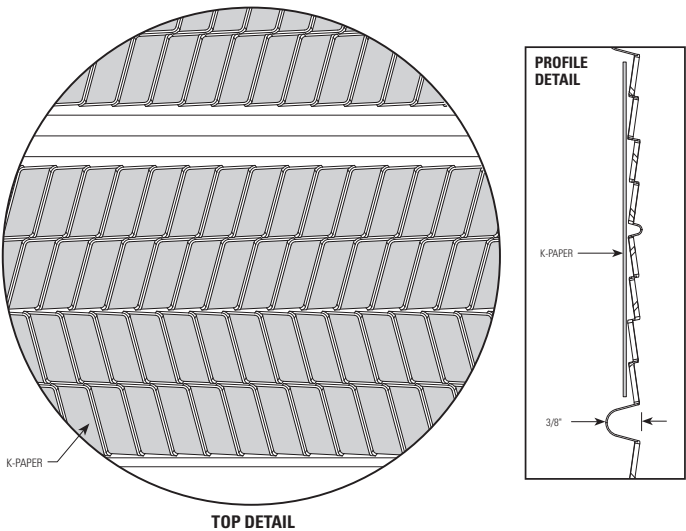


CEMCO's 3/8" Hi-Rib Lath is available with 3" strips of K-Paper attached to the spaces between the 3/8" ribs to minimize blow through of plaster when machine applied. This lath can be used in both vertical and horizontal applications. CEMCO 3/8" Hi-Rib w/ K-Paper is fabricated from 0.015-inch-thick in standard G60 hot-dipped galvanized steel. G90 is available upon special request.

PACKAGING

Sheet Size	Pieces/ Bundle	Yards/ Bundle	Yards/ Pallet	Bundle/ Pallet
27.5" x 96"	10	20	1000	50

1-A CORNERBEAD

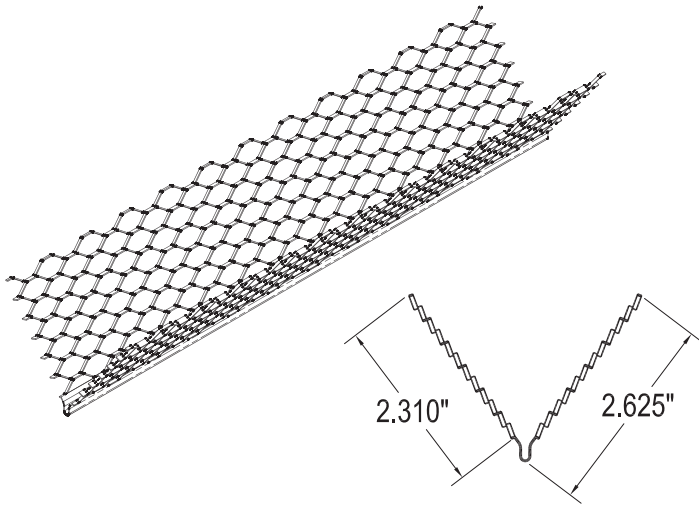


1-A Expanded Cornerbead is manufactured with 2-5/8" expanded metal flanges and a solid metal nose to provide for clean and sharp corners even over slightly irregular surfaces. CEMCO's No. 1-A Expanded Metal Cornerbead is manufactured by Niles and distributed by CEMCO. No. 1-A Cornerbead is fabricated from 26 Gauge galvanized steel with G60 coating. G90 coating is available upon request.

PACKAGING

Size (length)	Pcs./Ctn.	Ft./Ctn.	Wt./Ctn.	Ctn./Plt.
7'	30	210	50 lbs.	20
8'	30	240	52 lbs.	20
9'	30	270	54 lbs.	20
10'	30	300	56 lbs.	20
12'	30	360	62 lbs.	20

2-A CORNERBEAD

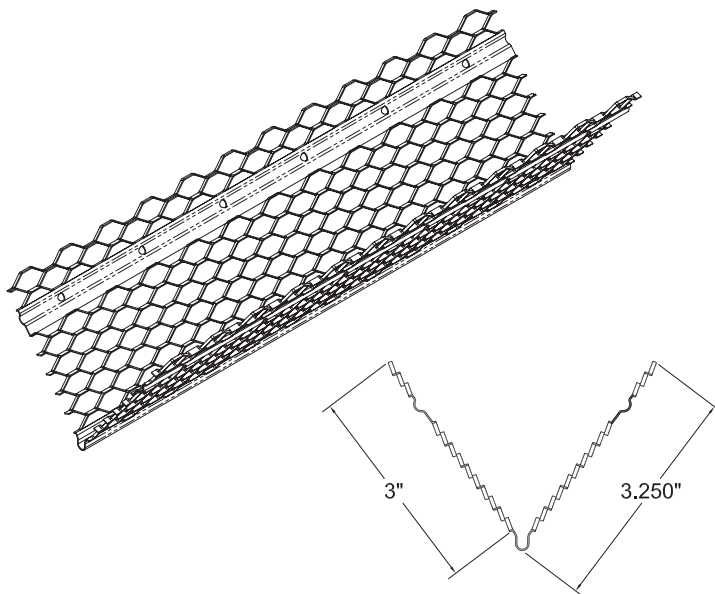


2-A Expanded Cornerbead is manufactured with extra long 3-1/4" flanges and a reinforced steel rib running the entire length of the piece to provide for extra rigidity when nailing to the corner. CEMCO's 2-A Cornerbead is manufactured by Niles Inc. No. 2-A Cornerbead is fabricated from 26 Gauge galvanized steel with G60 coating. G90 coating is available upon request.

PACKAGING

Size (length)	Pcs./Ctn.	Ft./Ctn.	Wt./Ctn.	Ctn./Plt.
7'	30	210	53 lbs.	40
8'	30	240	61 lbs.	40
9'	30	270	69 lbs.	40
10'	30	300	114 lbs.	40
12'	30	360	137 lbs.	40

SMOOTH EDGE CORNERITE



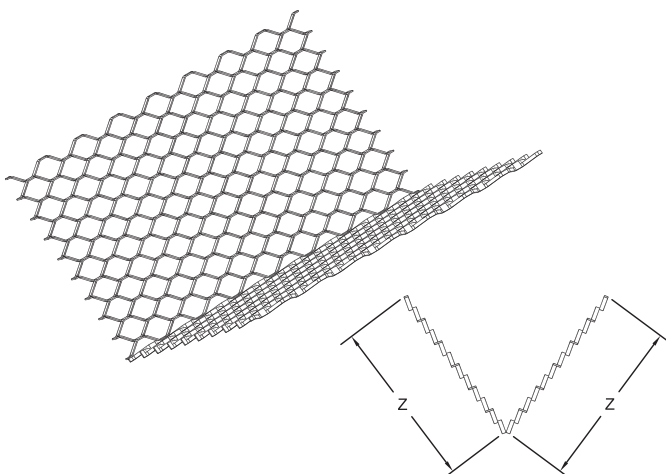


Cornerite is a smooth edge expanded metal lath corner reinforcement formed at a 105° angle to ensure a snug fit. This product also easily flattens for general patching. Cornerite is manufactured from steel meeting 0.016" thickness. Cornerite is manufactured from 1.75 expanded metal lath in standard G60 hot-dipped galvanized steel. G90 is available upon request.

PACKAGING

Z Size	Length	Pcs./Ctn.	Ft./Ctn.	Wt./Ctn.	Ctn./Plt.
2" x 2"	4'	125	500'	70 lbs.	20
2" x 2"	8'	75	600'	70 lbs.	18
3" x 3"	4'	75	300'	105 lbs.	18
3" x 3"	8'	75	600'	105 lbs.	18

CEMCORNER

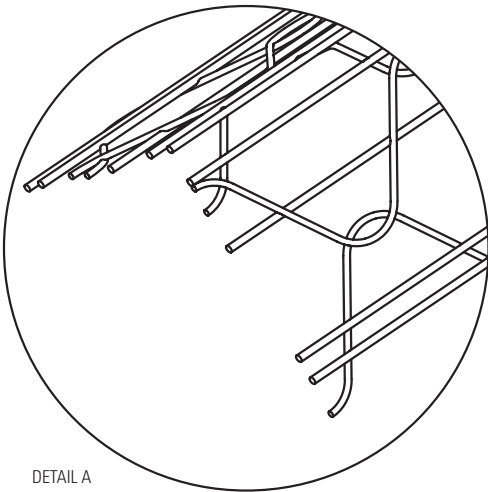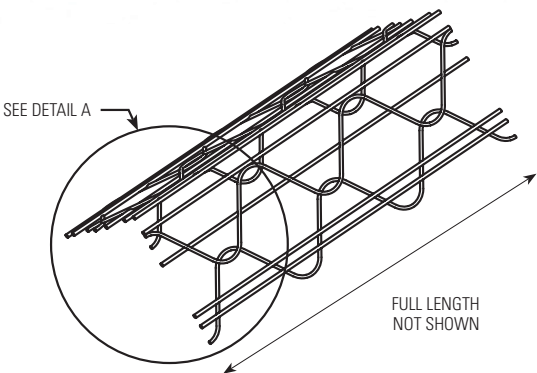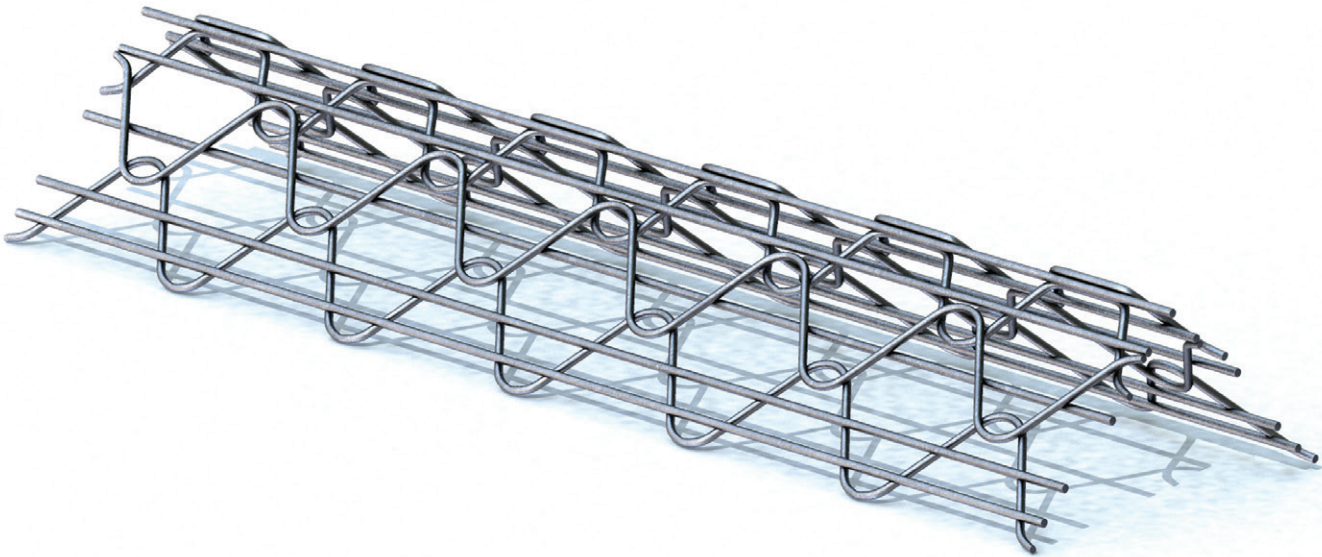


CEMCORNER is used as an exterior corner reinforcement that has a nailing strip along both sides for faster installation and straighter corners. CEMCORNER was designed so that it is easier for Portland cement plaster to flow into the nose of the CEMCORNER. CEMCORNER is fabricated from 17.5 GA. [0.054 inch diameter] galvanized welded-wire. CEMCORNER is available in the following configurations:

- Straight
- Straight Arch
- Straight Shortflange
- Bullnose
- Bullnose Arch
- Bullnose Shortflange

PACKAGING

Product	Length (ft)	Foot/Carton	Cartons/Pallet
Straight	8'	320	24
Straight	9'	360	24
Straight	10'	400	24
Straight Arch	10'	400	24
Straight Shortflange	10'	400	24
Bullnose	8'	320	24
Bullnose	9'	360	24
Bullnose	10'	400	24
Bullnose Arch	10'	400	24
Bullnose Shortflange	10'	400	24

STRIPITE

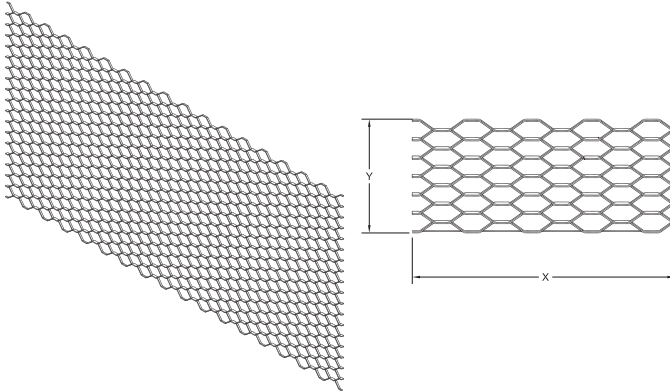


Stripite product is a general purpose expanded metal lath for plaster reinforcement. Stripite is a perfect addition to doors, windows, and other areas where cracking will most likely occur. Stripite is also used as a grout stop in cement block construction. Stripite is manufactured from 2.5 lath in standard G60 hot-dipped galvanized steel. G90 is available upon special request.

PACKAGING

Size	Weight./MLF (lbs)	Ft./Carton	Ctn./Pallet
4" x 96"	78	600	18
6" x 96"	115	600	18

PATCHES

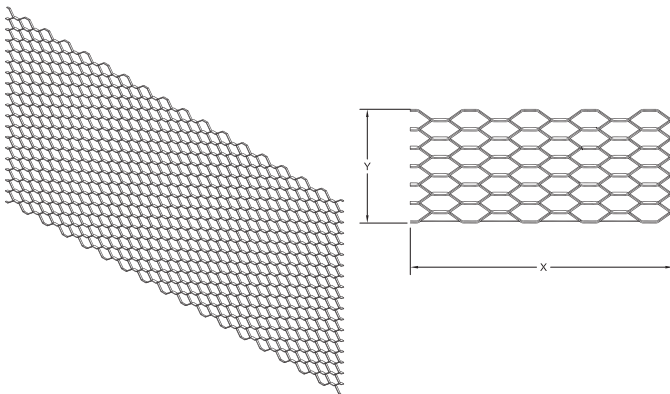


Patches are a recent development by CEMCO based on a timeless use of 2.5 diamond lath, but manufactured in strips or 'patches' to be used over door and window corners to greatly reduce cracking, by reinforcing stress areas. Patches can also be used as grout stop in masonry applications. Patches is manufactured in standard G60 hot-dipped galvanized steel. G90 is available upon special request.

PACKAGING

Patch Size	Pcs./Carton	Lineal Ft./Bundle
6" x 18"	200	300

#66 SHORT-FLANGE CASING

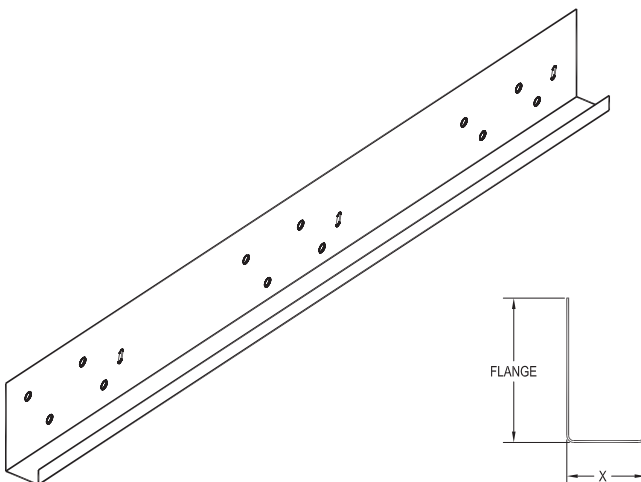


#66 Short-Flange Metal Casing Bead has a short 90-degree turn at the plaster surface for a clean and neat finish at the end of a wall or when adjoining dissimilar material. This product is manufactured with a slight arch in the 1-1/4" long nailing flange to ensure a tight fit. #66 is manufactured from 26 gauge standard G60 hot-dipped galvanized steel. G90 is available upon special request.

PACKAGING

Size X	Pcs./Carton	Length (ft.)	Ft./Ctn.	Wt./Ctn. (lbs)	Ctns./Pallet
3/8"	30	10'	300'	52	30
1/2"	30	10'	300'	59	30
3/4"	30	10'	300'	60	30
7/8"	30	10'	300'	62	30
1"	30	10'	300'	64	30
1-1/4"	30	10'	300'	68	30

#66 EXPANDED-FLANGE CASING

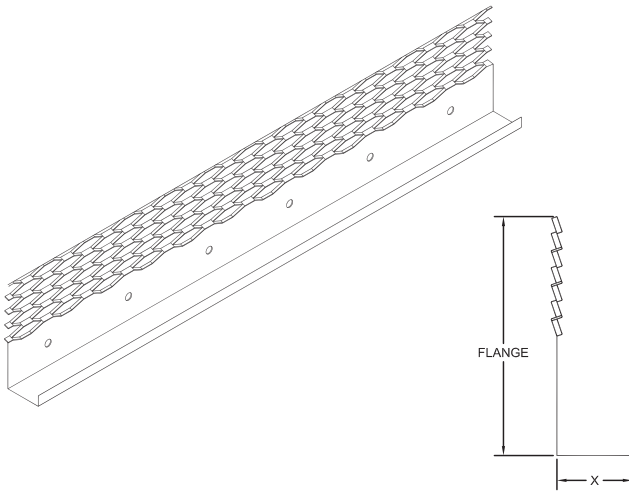


#66 Expanded-Flange Casing Bead formed to a 90° for applications at inside corners. Absorbs movement due to expansion and contraction of plastered walls. Provided with an expanded flange for proper keying and easy application. No.66 Expanded Flange Casing Bead is fabricated from 26 Gauge galvanized steel in standard G60. G90 coating is available upon request.

PACKAGING

Size X	Flange Size (in.)	Pcs./ Carton	Length (ft.)	Ft./ Ctn.	Wt./Ctn. (lbs.)	Ctns./ Pallet
1/4"	2-5/8"	30	10'	300'	42	40
3/8"	2-5/8"	30	10'	300'	48	40
1/2"	2-5/8"	30	10'	300'	55	40
3/4"	2-5/8"	30	10'	300'	58	40
7/8"	2-5/8"	30	10'	300'	62	40
1"	2-5/8"	30	10'	300'	64	40
1-1/4"	2-5/8"	30	10'	300'	68	40

#7 FOUNDATION SILL SCREED

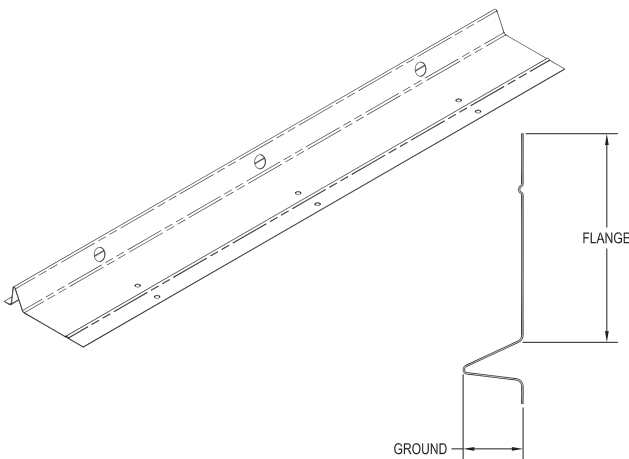


#7 Foundation Sill Screed is commonly known as FHA Screed due to its meeting of FHA requirements. Nails or stapled to the sill plate provides a straight line stucco stop. Manufactured with 1/2" holes, the sill screed allows for water and moisture to weep from the exterior plaster system and away from the structure. No. 7 sill screed is fabricated from 26 ga. G60 hot-dipped galvanized steel. G90 coating is available upon request.

PACKAGING

Size	Ground (in.)	Flange Size (in.)	Length (ft.)	Pcs./ Bundle	Pcs./ Pallet
5-1/2"	1/2" 5/8" 3/4" 7/8"	3-1/2"	10'	10	1000
5-1/2"	1-3/8"	3-1/2"	10'	10	500

#36 FOUNDATION SILL SCREED

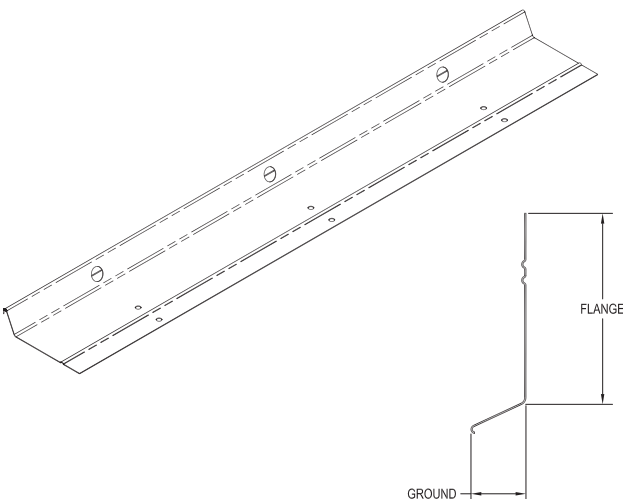


CEMCO's #36 Foundation Sill Screed is manufactured in 7/8" ground WITH 1/2" weep holes for drainage. The lack of a full-return on the bottom allowing for trowel access to clean access stucco material, leaving no visible metal below the stucco finish line. No. 36 sill screed is fabricated from 26 ga., G60 hot-dipped galvanized steel. G90 coating is available upon request.

PACKAGING

Size	Ground (in.)	Flange Size (in.)	Length (ft.)	Pcs./ Bundle	Pcs./ Pallet
5-1/2"	7/8"	3-1/2"	10'	10	1000

#34 FOUNDATION SILL SCREED

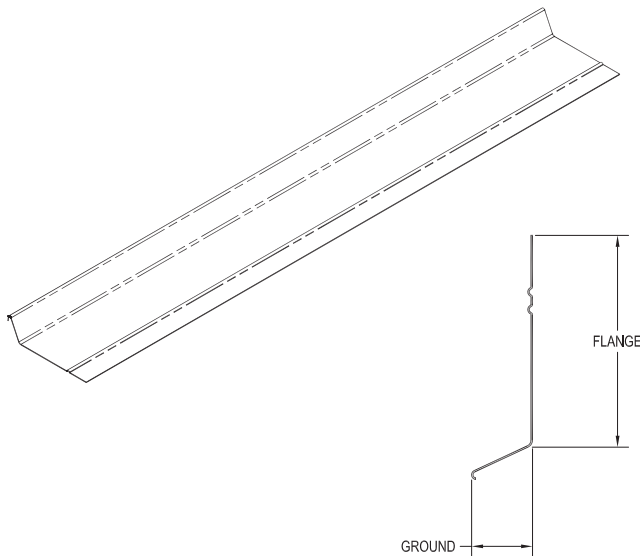


#34 Foundation Sill Screed is identical to CEMCO's #36 sill screed but without the 1/2" drainage holes. Offered in 7/8" ground, No. 34 sill screed is fabricated from 26 ga., G60 hot-dipped galvanized steel. G90 coating is available upon request.

PACKAGING

Size	Ground (in)	Flange Size (in.)	Length (ft.)	Pcs./ Bundle	Pcs./ Pallet
5-1/2"	7/8"	3-1/2"	10'	10	1000

J-METALS

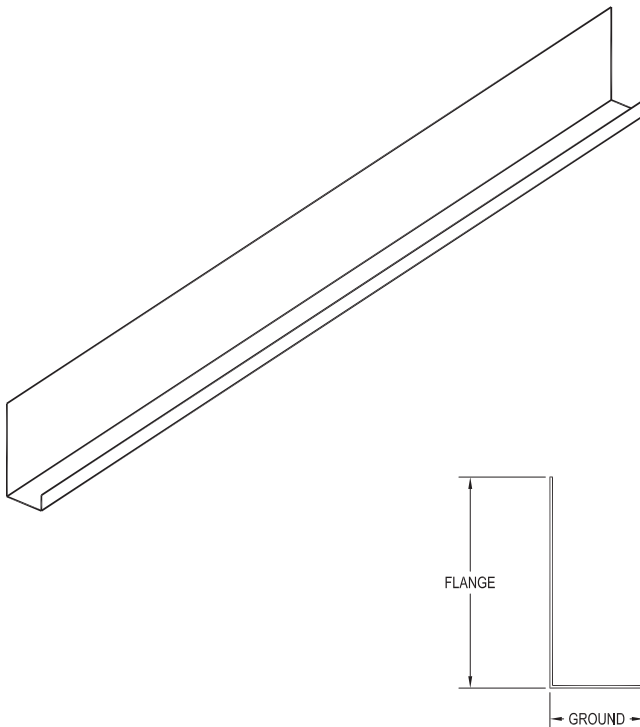


"J" Metal products are manufactured in various grounds (depths) to be used with a variety of polystyrene or foam insulation boards for exterior purposes. "J" Metal also provides for a workable screed around doors and windows. "J" Metal can also be ordered with holes and be used in some applications as a weep screed, and with a short flange (1-3/4") or long-flange (3-1/2"). CEMCO's J-Metal is fabricated from 26 ga., G60 hot-dipped galvanized steel. G90 coating is available upon request.

PACKAGING

Gauge	Ground (in.)	Flange Size (in.)	Wt./Mlf (lbs)	Pcs./ Bundle	Bdls./ Pallet
26	7/8"	1-3/4" (SF)	<insert>	10	50
26	1-3/8"	1-3/4" (SF)	<insert>	10	50
26	7/8"	1-3/4" (SF)	<insert>		
26	3/8"	3-1/2" (LF)	<insert>	10	50
26	1/2"	3-1/2" (LF)	<insert>	10	50
26	3/4"	3-1/2" (LF)	<insert>	10	50
26	7/8"	3-1/2" (LF)	<insert>	10	50
26	1-3/8"	3-1/2" (LF)	<insert>	10	50
26	1-1/2"	3-1/2" (LF)	339	10	50

DOUBLE "J" (#XJ-15) CONTROL JOINT

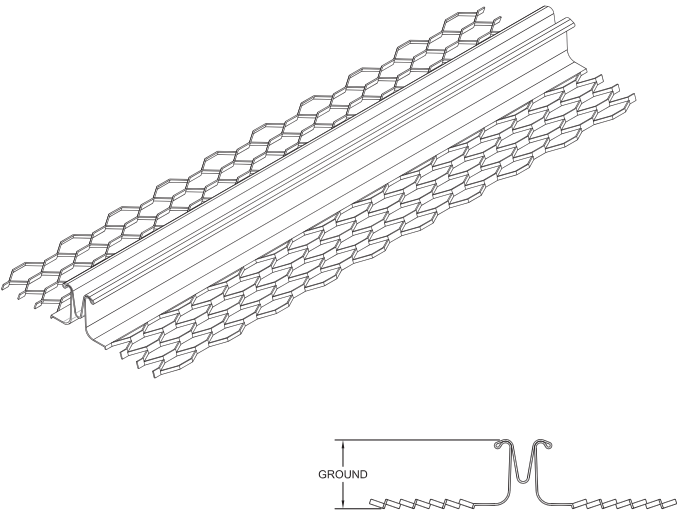


Double "J" (XJ-15) Control joint relieves stresses and strains in large plaster walls and ceilings. This product has expanded flanges for proper keying and easy application. Its unique design permits the plaster to key underneath the rolled edges for added adhesion while the walls expand and contract under typical conditions. The pull tape on the joint itself permits a clean finish when removed after the finish coat. CEMCO's Double "J" Control Joint is manufactured from 26 ga. G60 hot-dipped galvanized steel by Niles and distributed by CEMCO. G90 is also available upon special request.

PACKAGING

Ground (Depth)	Pcs./ Carton	Length (ft.)	Ft./Ctn. (ft.)	Wt./Ctn. (lbs)	Ctns./ Pallet
1/2"	24	10'	240'	74	40
3/4"	24	10'	240'	80	40
7/8"	24	10'	240'	84	40

DOUBLE "V" (#15) CONTROL JOINT

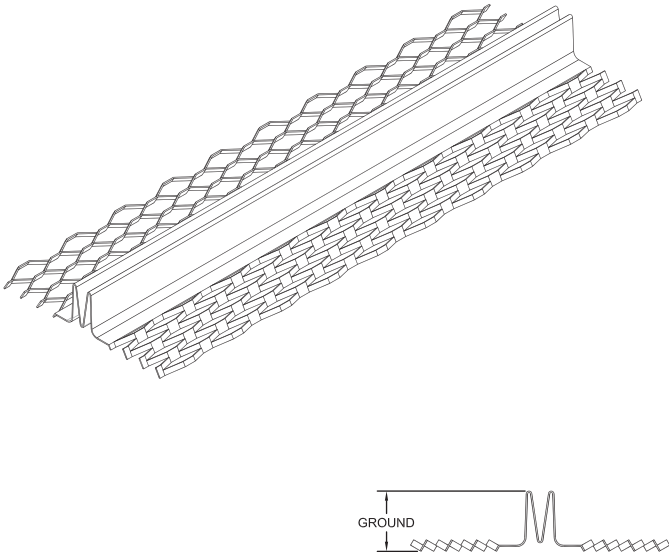


Double "V" (#15) Control joint relieves stresses and strains in large plaster walls and ceilings. This inconspicuous product provides a clean and neat joint in exterior applications. This product has expanded flanges for proper keying and easy application. CEMCO's Double "V" Control Joint is manufactured from 26 ga., G60 hot-dipped galvanized steel by Niles and distributed by CEMCO. G90 is also available upon special request.

PACKAGING

Ground (Depth)	Pcs./ Carton	Length (ft.)	Ft./Ctn. (ft.)	Wt./Ctn. (lbs)	Ctns./ Pallet
1/4"	24	10	240'	45	42
3/8"	24	10	240'	48	42
1/2"	24	10'	240'	74	40
3/4"	24	10'	240'	80	40
7/8"	24	10'	240'	84	40

#30 CORNER CONTROL JOINT

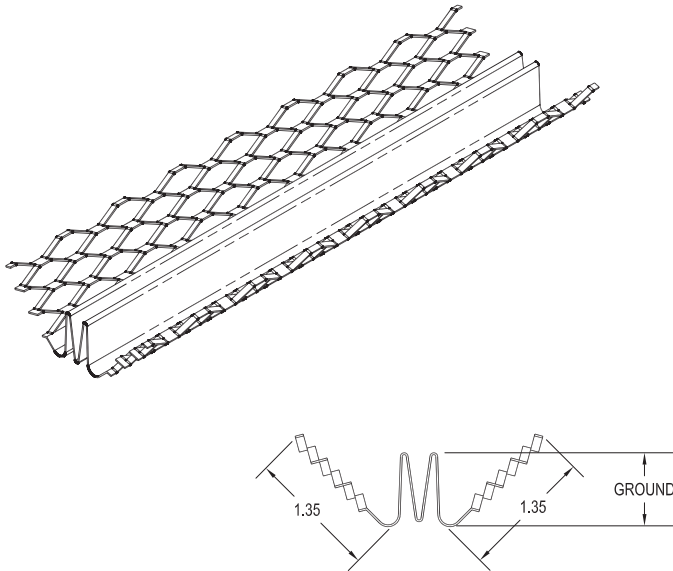


#30 corner expansion joint is a Double-V expansion joint formed to a 90° for applications at inside corners. Absorbs movement due to expansion and contraction of plastered walls. Provided with an expanded flange for proper keying and easy application. #30 is manufactured from 26 ga., G60 hot-dipped galvanized steel. G90 is also available upon special request.

PACKAGING

Ground (Depth)	Pcs./ Carton	Length (ft.)	Ft./Ctn. (ft.)	Wt./Ctn. (lbs)	Ctns./ Pallet
1/2"	24	10'	240'	66	40
3/4"	24	10'	240'	74	40
7/8"	24	10'	240'	83	40
3/4"	24	10'	240'	80	40
7/8"	24	10'	240'	84	40

#093 ZINC CONTROL JOINT


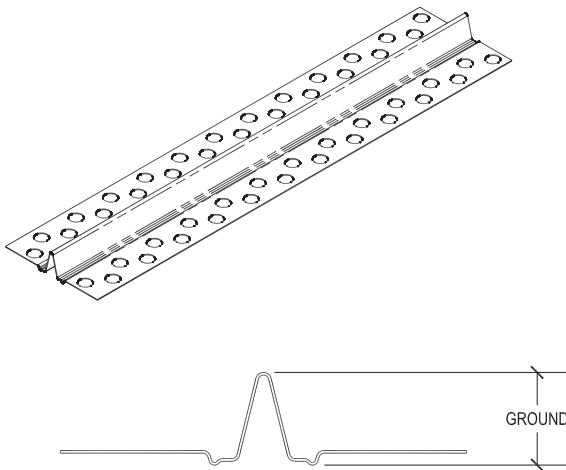


.093 true-zinc control joint is perfect for interior high-end plaster applications, allowing for controlled expansion of the ceiling or wall finish. Made from high quality 26 ga. zinc, and formed to exacting tolerances, the .093 bead has a tape protected expansion trough to provide for crisp and clean finishes in both plaster and veneer finishes. CEMCO's .093 control joint is manufactured by Niles and distributed by CEMCO.

PACKAGING

Ground	Length	Pcs./Ctn.	Ft./Ctn.	Wt./Ctn. (lbs)	Ctns./ Pallet
0.478"	10'	25	250'	66	40

#093X FIRE-RATED CONTROL JOINT

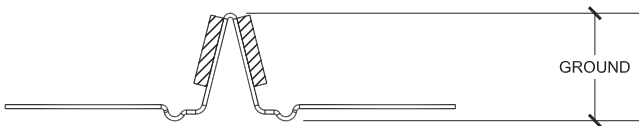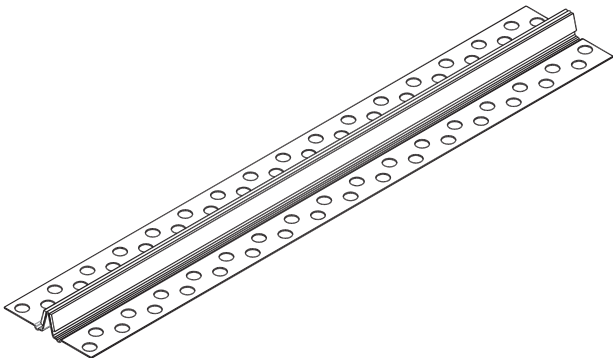


CEMCO's FAS-093X Fire Rated control joint is a composite control joint with intumescent tape factory applied to the back side of the control joint. The opening is protected by an orange plastic tape to indicate the fire rating. This tape is removed after joint compound has been applied and the finish is completed. The section is fabricated from standard G40 hot-dipped galvanized steel.

PACKAGING

Ground	Length	Pcs./Ctn.	Ft./Ctn.	Wt./Ctn. (lbs)	Ctns./ Pallet
0.478"	10'	20	200'	70	20

#3 FLASHING SCREED

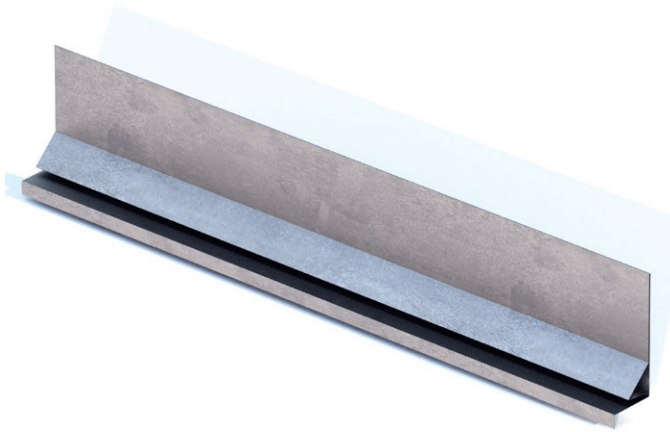


The #3 FLASHING SCREED is manufactured for applications above windows, doors and vents on exterior plaster walls. The #3 Flashing Screed consists of a combined single piece 45° weep screed, for drainage, an a Z flashing for window head protection. Available with or without weep holes. The #3 Flashing Screed is fabricated from minimum 0.018-inch thick hot-dipped galvanized steel having a minimum G-90 coating.

PACKAGING

Size	Pcs./ Bundle	Length (ft.)	Ft./ Bundle (ft.)	Wt./Bdl (lbs)	Pieces/ Pallet
7/8"	10	10'	100	69	250

#6 HEAD DRIP SCREED

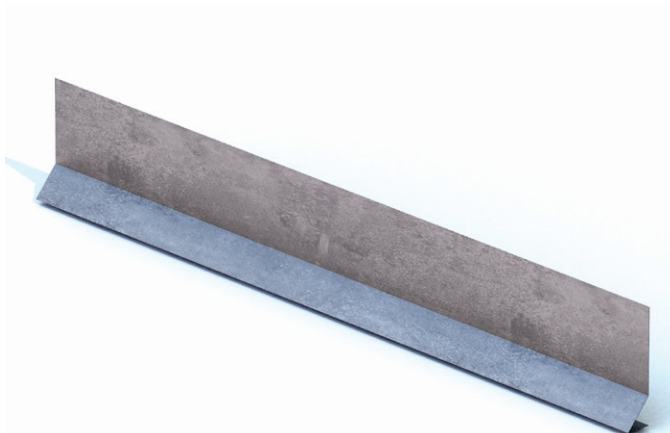


The #6 HEAD DRIP SCREED is manufactured for application above windows, doors, base of walls, and vents on exterior plaster walls. The 45° slope allows water to weep out of the assembly, and the 90° return provides a 3/4-inch solid metal leg for sealant application from stucco assembly to dissimilar materials. #6 Head/Foundation Drip Screed is fabricated from minimum 0.018-inch thick hot-dipped galvanized steel having a minimum G-90 coating.

PACKAGING

Size	Pcs./ Bundle	Length (ft.)	Ft./ Bundle (ft.)	Wt./Bdl (lbs)	Pieces/ Pallet
3/4"	20	10'	200	84	30
7/8"	20	10'	300	84	30

#7 EXTENDED FOUNDATION SCREED

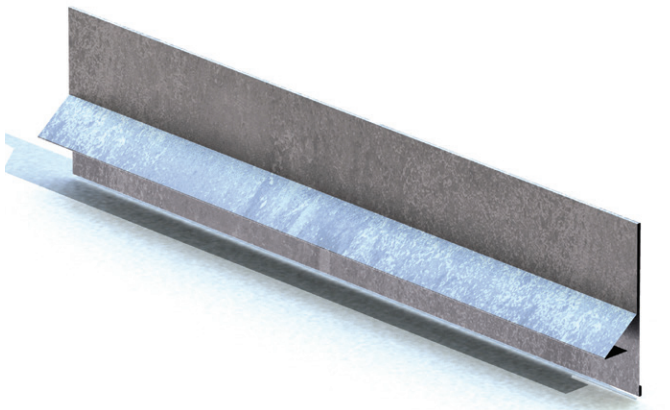


The #7 EXTENDED FOUNDATION SCREED provides an additional layer of 25 ga. G90 metal to protect waterproof deck membranes at the base wall from U.V. degradation. The #7 EXTENDED FOUNDATION SCREED is fabricated from minimum 0.018-inch thick hot-dipped galvanized steel having a minimum G-90 coating.

PACKAGING

Size	Pcs./ Bundle	Length (ft.)	Ft./ Bundle (ft.)	Wt./Bdl (lbs)	Pieces/ Pallet
7/8"	10	10'	100	76	250

#9 HORIZONTAL CONTROL JOINT

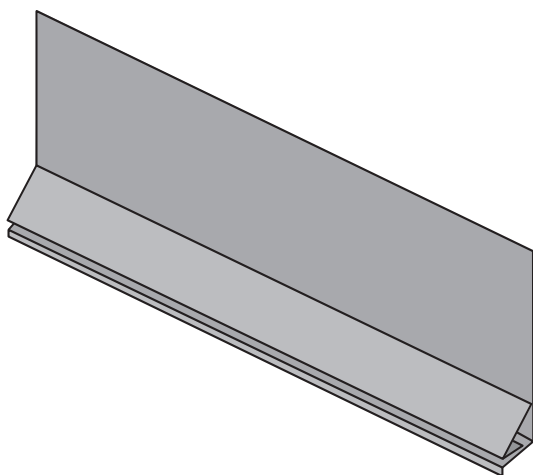


The #9 Horizontal Control Joint is manufactured for applications over dissimilar substrates. The 45° slope allows water to weep out of the assembly. The lower screed point allows the wall to stay in alignment while also providing stucco movement capabilities to prevent stucco from cracking between dissimilar substrates. The #9 Horizontal Control Joint is part of CEMCO's Water Management Product Line of Stucco Accessories fabricated from minimum 0.018-inch thick hot-dipped galvanized steel complying with ASTM A653 having a minimum G-90 coating complying with ASTM A925. Water tested per ASTM E1105.

*Custom ground sizes available for (CI) Continuous Insulation stucco assemblies.

PACKAGING

Size	Pcs./ Bundle	Length (ft.)	Ft./ Bundle (ft.)	Wt./Bdl (lbs)	Pieces/ Pallet
7/8"	10	10'	100	63	250

#12 SOFFIT DRIP EDGE

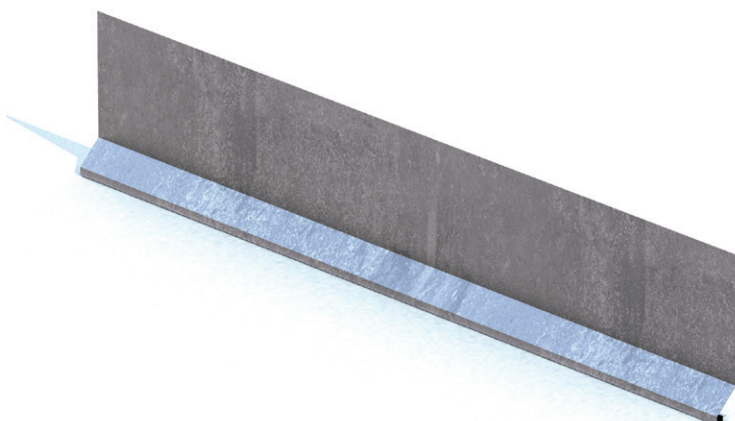


The #12 SOFFIT DRIP EDGE is manufactured for soffit and recessed windows head application. The 45° slope allows water to weep out of the assembly. The Drip edge provides a place for water to drip from rather than travel back along the soffit. The #12 SOFFIT DRIP EDGE fabricated from minimum 0.018-inch thick hot dipped galvanized steel having a minimum G-90 coating.

PACKAGING

Size	Pcs./ Bundle	Length (ft.)	Ft./ Bundle (ft.)	Wt./Bdl (lbs)	Pieces/ Pallet
3/4"	20	10'	100	38	250
7/8"	20	10'	100	38	250

#15 SOLID LEG CONTROL JOINT

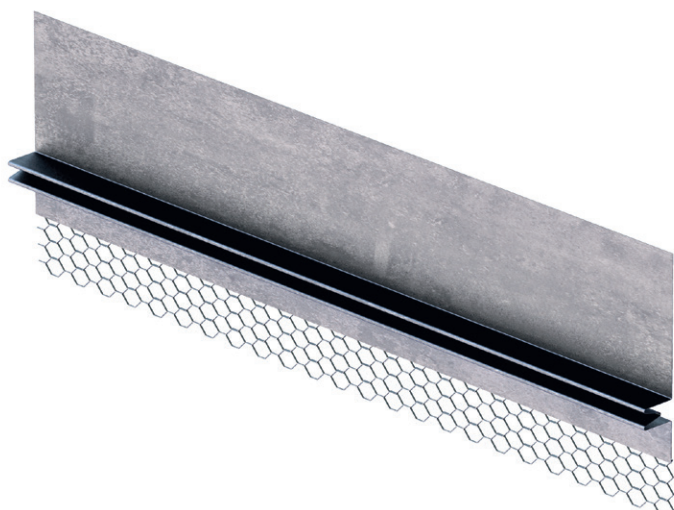


The #15 SOLID LEG CONTROL JOINT is manufactured for horizontal application on exterior plaster walls. The .30" gap in the V groove is designed to allow movement due to horizontal expansion and contraction of plastered walls. The 5" x 3/4" horizontal control joint has a 3" long upper solid flange that allows for water to weep out of the stucco cavity and a 1.5" long lower expanded metal flange that allows proper keying of plaster. The #15 Solid Leg Control Joint is fabricated from minimum 0.018-inch thick hot-dipped galvanized steel having a minimum G90 coating.

PACKAGING

Size	Pcs./ Bundle	Length (ft.)	Ft./ Bundle (ft.)	Wt./Bdl (lbs)	Pieces/ Pallet
3/4"	15	10'	200	84	30
7/8"	15	10'	300	84	30

J-SERIES CASING BEAD

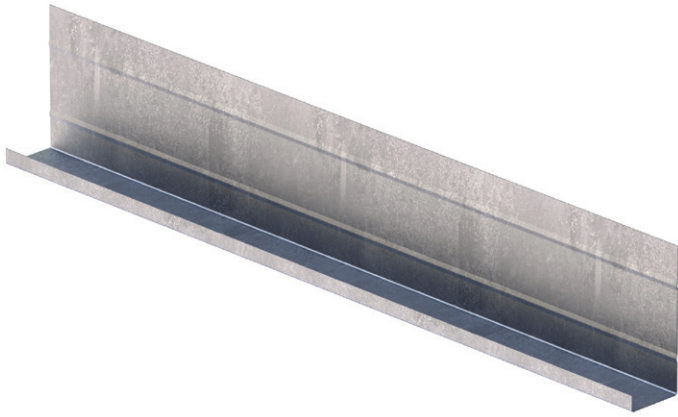


The J-SERIES CASING BEAD is manufactured non-perforated to enable the casing bead to have solid flashing capabilities. J-Series Casing Bead is fabricated from minimum 0.018-inch thick hot-dipped galvanized steel having a minimum G-90 coating.

PACKAGING

J-Bead Flange Depth (A)	Ground Width (G)	Casing Bead Lip (F)
2-1/2"	3/4" & 7/8"	1/4" & 1/2"
3-1/2"	3/4" & 7/8"	1/4"

M-SLIDE EXPANSION JOINT

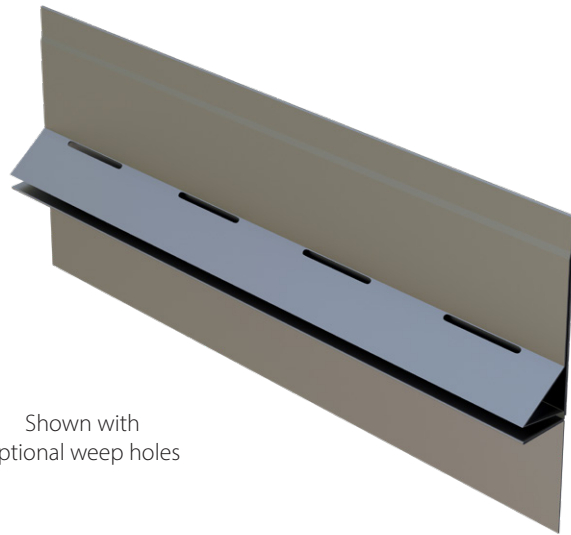

Shown with
optional weep holes

The M-SLIDE EXPANSION JOINT is manufactured for application where movement is anticipated. The self-aligning two-piece design allows for 1-inch vertical movement while maintaining a watertight assembly for plaster walls. M-Slide expansion joint is fabricated from minimum 0.018-inch thick hot-dipped galvanized steel having a minimum G-90 coating. Available with or without weep holes.

PACKAGING

Size	Pcs./ Bundle	Length (ft.)	Ft./Bun- dle (ft.)	Wt./Bdl (lbs)	Pieces/ Pallet
7/8"	10	10'	100	9.4	200



A series of horizontal lines for taking notes, spanning the width of the page below the header.



Metal Lath and Water Management Products | www.cemcosteel.com | 800.775.2362



Expanding Your Solutions

Corporate Headquarters

13191 Crossroads Parkway North, Suite 325, City of Industry, CA 91746

P: 800.775.2362 | **F:** 626.330.7598

Southern California Manufacturing Facility

263 North Covina Lane, City of Industry, CA 91746

P: 800.775.2362 | **F:** 626.330.7598

Northern California Manufacturing Facility

1001-A Pittsburg Antioch Hwy, Pittsburg, CA 94565

P: 925.473.9340 | **F:** 925.473.9341

Denver Colorado Manufacturing Facility

490 Osage Street, Denver, CO 80204

P: 303.572.3626 | **F:** 303.572.3627

Fort Worth Texas Manufacturing Facility

8600 Will Rogers Blvd, Fort Worth, TX 76140

P: 817.568.1525 | **F:** 817.568.2759

www.cemcosteel.com

